


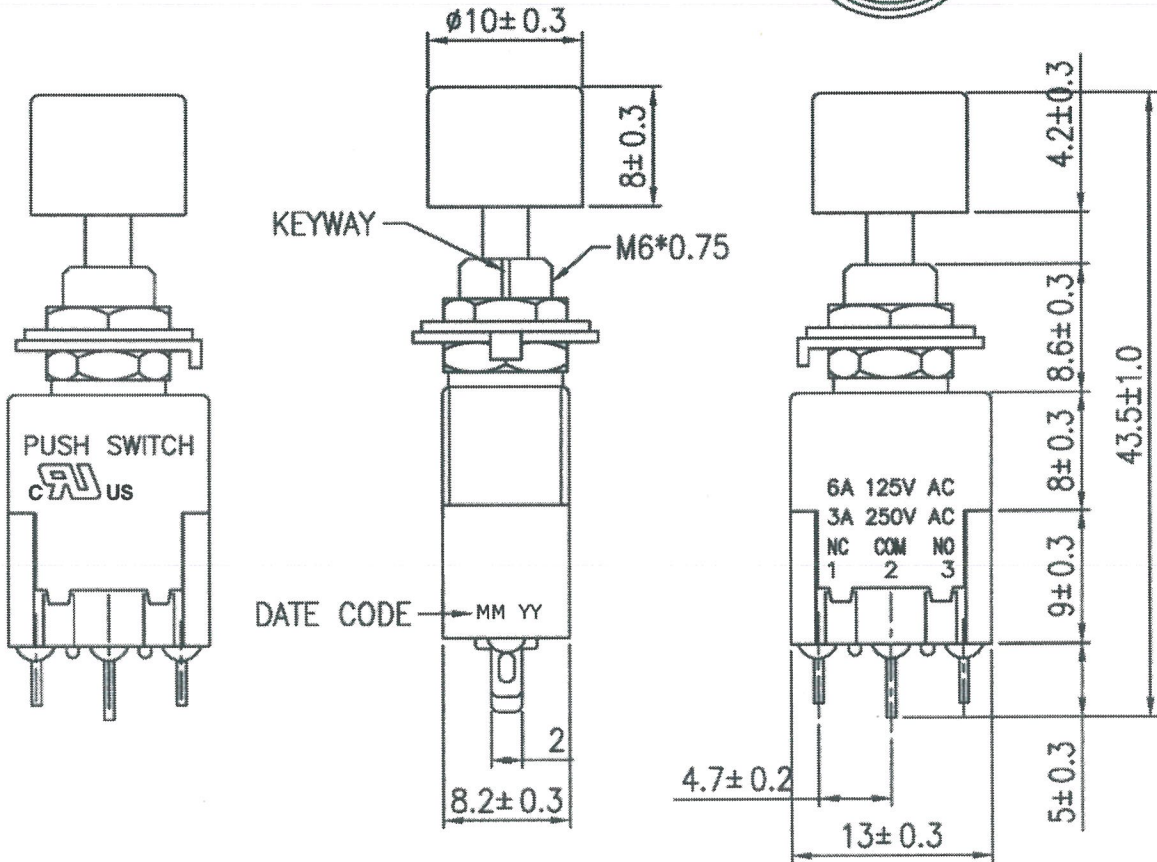



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

|                       |                          |   |  |   |
|-----------------------|--------------------------|---|--|---|
| Rating                | 6A 125V AC<br>3A 250V AC |  | Mounting Hole  | Circuit Diagram   |
| Contact Resistance    | 50m ohm max.             |   |  |  <p>SPDT ON - (ON)<br/>( ) = Momentary</p> |
| Insulation Resistance | DC 500V 100M ohm min.    |   |  |   |
| Dielectric Strength   | AC 1000V 1 minute        |   |  |   |
| Operating Temperature | -20°C ~ 65°C             |   |  |   |

BASE COLOR: Black  
BUTTON COLOR: Black

Cut-Out 4mm thk. max.



RoHS Compliant

MASTER

|   |  |
|---|--|
| 2 | Removed logo. DW 1/06/23   |
| 1 | Removed CSA from 2 places, Base color black was blue & added C US. 12/06/11. |

PA106A1-BB

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: 12/22/09

Rev. 2

Unit: mm

Checked By: *G. GOLD*

Title: **MINI PUSH BUTTON**

CW P/N: **GPB001PA06A1UB**