InActive

THIS IS A REDUCTION
DO NOT SCALE

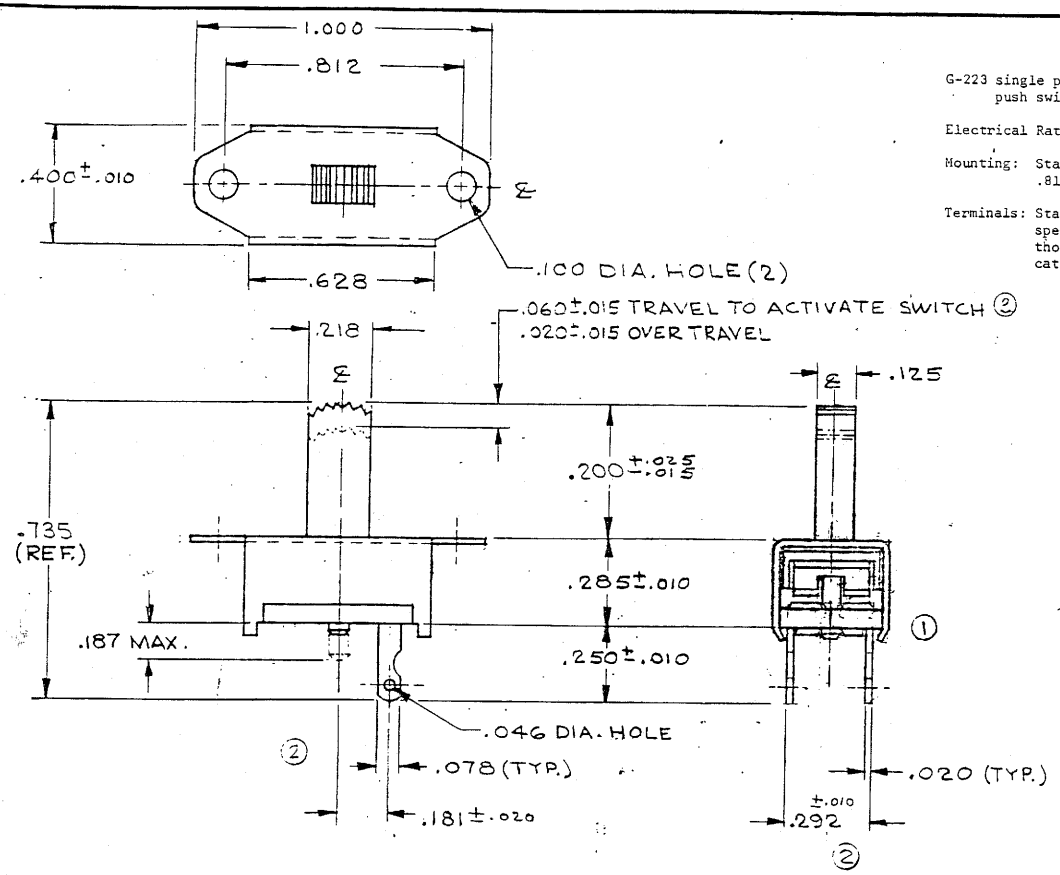

G-223 single pole/single throw momentary action push switch.

Electrical Rating: .25 a. 125 v. AC-DC **U.L. Listed**

Mounting: Standard- two 0.100" diameter holes on .812" centers.

Terminals: Standard is terminal G-20-28 but you may specify the terminal of your choice from those shown in drawing T-3, page 9, catalog 2096.

Buttons: Standard is .200" high black, G-02-158-1. Optional are .328" G-02-158-2; .453" G-02-158-3, and .438" G-02-158.

Topper: For dressing up your control panel, add a CW Topper G-02-56 to your switch button. Available in chrome and in colors described on page 2, catalog 2096. For dimensional details and orientation to switch, see drawing EL-3, page 9, catalog 2096.

G-223-0000

REVISIONS	0	1	2	3
DATE APP. / ENG. APP.	11/5/73	NOV	DEC	FEB 4	APR 3
		END VIEW & VID. ADDED; PUSH BUTTON J.V. 11-30-73	REV'D. TERMINALS LOCATION J.V. 1-31-74	ADDED: TO ACTUATE SWITCH J.V. 4-2-74

DIMENSIONS ARE IN INCHES. DO NOT SCALE DRAWING.

VARIATIONS ON FINISHED DIMENSIONS UNLESS OTHERWISE MARKED

TOLERANCES UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMAL ± .010
3 PLACE DECIMAL ± .005
FRACTIONS ± 1/64
ANGULAR DIMENSIONS ± 1/2°

PDF File Made

BULLETIN 2096-4

FIRST MADE FOR

DRAWN BY J.V.
DATE DRAWN 11-5-73
CHECKED BY

CW INDUSTRIES
WARMINSTER, PA 18974

G-223-0000