
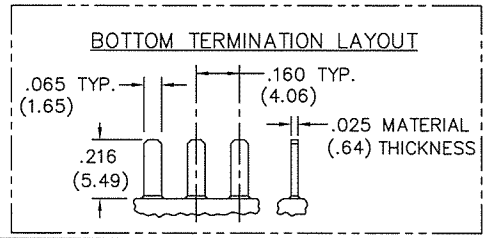


DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING Dwg. No. GC-536-0102

SPECIFICATIONS:
MATERIALS:

- HOUSING & BASE - Nylon and or Glass Filled
Nylon 6/6 UL 94-V2 minimum
- ACTUATOR - Nylon 6/6 UL 94-V2 minimum
- MOVING CONTACT - Copper Alloy/Phos. Bronze Silver Plated
- STATIONARY CONTACT - BeCu 174 Alloy/75µin. Silver Plated
- ELECTRICAL RATING - 1A. 125V.A.C.
3A. 14V.D.C.
- MECHANICAL PERFORMANCE - 30,000 Cycles minimum
at Rated Load.
- OPERATING FORCE - 20 - 31ozs.,
5.6 - 8.6 Newtons,
Spec. as Tested
- VOLTAGE DROP - .030V. MAX @ .7A
- TERMINATION - Insert male tabs into switch housing
using side or bottom termination option. Refer
to termination option layout for dimensions."

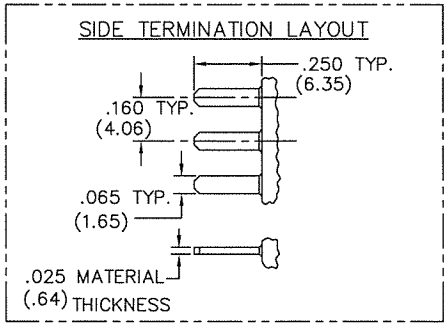

1 2 3 4 5 6 7 8 9 10

FORM-B3	REVISIONS	4	REDRAWN. ADDED METRIC TO DRAWING. UPDATED OPERATING FORCE. DGW 4-05-2002 GG
		5	ADDED FORCE VS BUTTON TRAVEL CHART. DGW 6-19-2003 CH 6-19-03

ATTENTION
THIS DRAWING AND ITS ATTACHMENTS, IF ANY, ARE PROPRIETARY TO CW INDUSTRIES AND DESCRIBE DESIGNS THAT ARE CONFIDENTIAL AND MUST NOT BE DISCLOSED UNLESS AUTHORIZED, IN WRITING, BY AN OFFICER OF CW INDUSTRIES.....

CW INDUSTRIES
Southampton, Pa. 18966

TOLERANCES UNLESS OTHERWISE SPECIFIED	
2 Place Decimal ±.010	METRIC
3 Place Decimal ±.005	1 Place Dec. ±.25mm
Angles ±1'	2 Place Dec. ±.13mm

Made for: CW IND.
Drawn by: DGW 4-07-98
Checked by: GG 4-5-02
Approval: CH 4-5-02

Title: SWITCH ASSEMBLY
PUSH ON-PUSH OFF
S.P.D.T.
W/SPECIAL BUTTON

Division: SWITCH
Dwg. No. GC-536-0102