THIS INFORMATION IS CONFIDENTIAL AND PROPIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN CW INDUSTRIES PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING .....

Dwg. No. GHB SERIES

REVISIONS

0	Initial Release AP 05/01/26
1	Added Optional ON - OFF view. DW 05/15/26

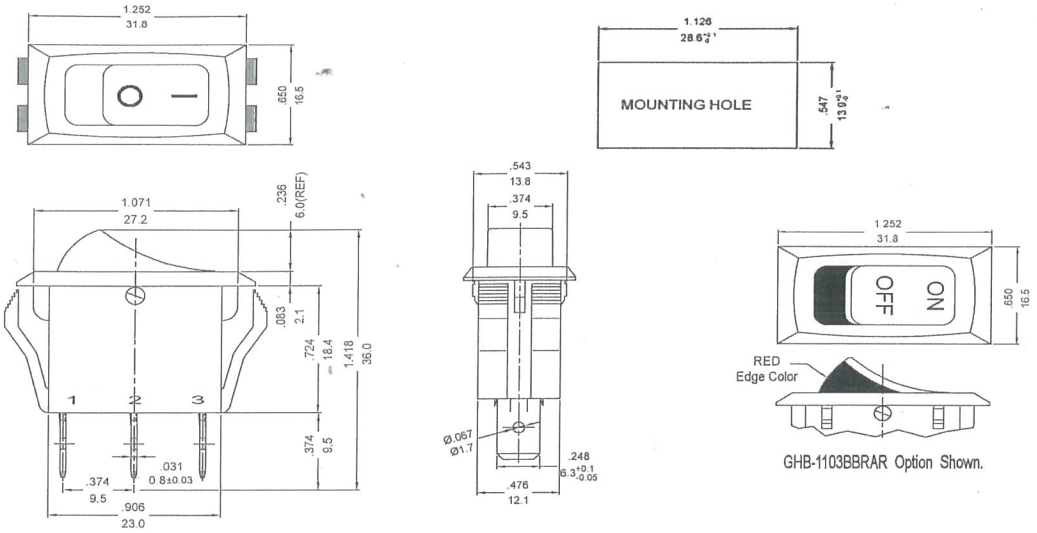

GHB-1103BBRAR Option Shown.

SPECIFICATIONS:

RATING: 20A 125VAC / 16A 250VAC (UL/CUL)
16(4)A 250VAC ~ T125/55 (ENEC, CQC)

DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE

INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)

CONTACT RESISTANCE: 20 mΩ INITIAL (MAX)

ELECTRIC LIFE: 10,000 CYCLES MIN

MECHANICAL LIFE: 30,000 CYCLES MIN

TEMPERATURE RANGE: -20 TO +85 °C

BASE: NYLON 6/6,94V-2 MIN

ACTUATOR: NYLON 6/6,94V-2 MIN

MOVING CONTACT: SILVER PLATED COPPER ALLOY

TERMINALS: SILVER PLATED COPPER ALLOY

Item Number Example :

GHB	—	1	2	0	5	B	B	N	A	W

SERIES	POLE	FUNCTION	TERMINAL TYPE	MARKING TYPE	BASE COLOR	ACTUATOR COLOR	ACTUATOR EDGE COLOR	PANEL OPENING	LEGEND COLOR
GHB	1 SINGLE	1 ON-OFF	0 QUICK CONNECT .250 WIDE	1 HI LO (5 HI)	B BLACK	B BLACK	N NONE	A 1.125 x .550	N NONE
		2 ON-ON	1 SOLDER	2 NO MARKING	W WHITE	W WHITE	G GREEN	B 1.072 x .480	B BLACK
		3 ON-OFF-ON	3 QUICK CONNECT .187 WIDE	3 ON OFF (OFF ON)	A GRAY	R RED	R RED		R RED
				4 0 I (0 I)		A GRAY	W WHITE		W WHITE
				5 0 — (0 —)					G GRAY
				6 I O I I (I O II)					

OSLO SWITCH
CW Industries
A Unit of Electro Switch Corp.

TOLERANCES UNLESS OTHERWISE SPECIFIED

2 Place Decimal ± .010	METRIC
3 Place Decimal ± .005	1 Place Dec ± 25mm
Angles ± 1°	2 Place Dec. ± .13mm

Title: GHB SERIES
STANDARD ROCKER SWITCH
1.125 X .550
1.072 X .480

Made for: CW IND.
Drawn by: AP 05/01/26
Checked by: G. GOLD 5-15-26
Approval:

Division: SWITCH

Dwg. No. GHB SERIES

MASTER