THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

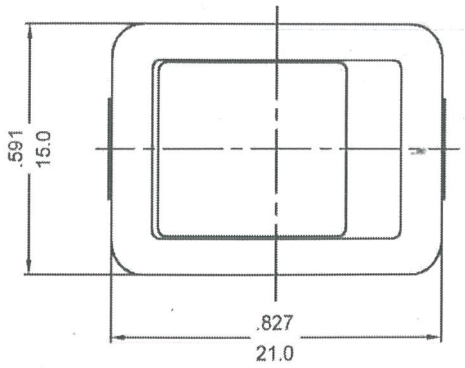



Rating: 12(4)A 125/250V~ (cURus/ENEC 15)
16(4)A 125/250V~ (cURus/ENEC 15)
10(4)A 250V~ T125/55 (CQC)

Dielectric Withstand Voltage: 1500VAC for 1 minute
Insulation Resistance: 500VDC 100MΩ(Min.)
Contact Resistance: 20mΩ Initial (Max.)
Function: SPST ON - OFF
Actuator Color: Black
Housing Color: Black

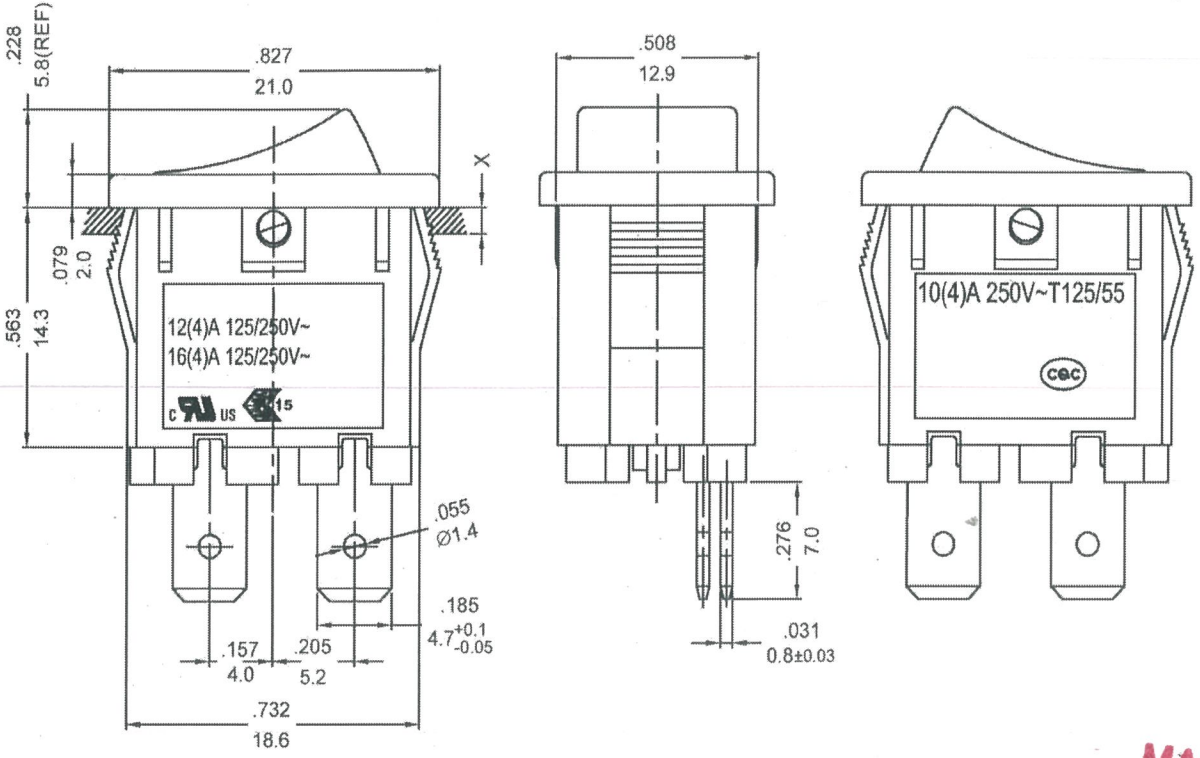



X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	19.2 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm
1.25~2mm	19.4 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm
2~3mm	19.8 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm

PANEL CUTOUT DIMENSION TABLE

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

MASTER

MR-110C2N-NBBC-2ANC

CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: DW 7/9/26	Rev. 0	Unit:	Checked By: G.GULD
	Title: ROCKER SWITCH		CW P/N: GMR102NNBBC	