THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

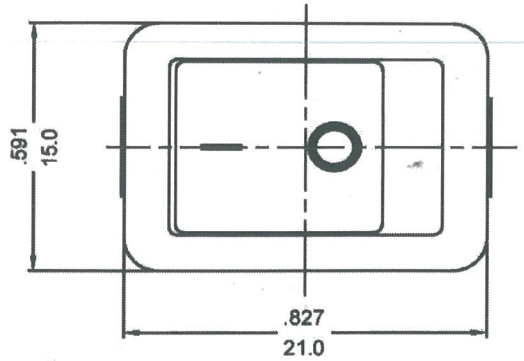

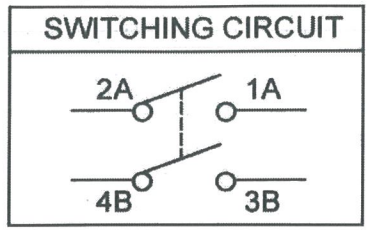

Rating: 12(4)A 125/250V~ (cURus/ENEC 15)
16(4)A 125/250V~ (cURus/ENEC 15)
10(4)A 250V~ T125/55 (CQC)
Dielectric Withstand Voltage: 1500VAC for 1 minute
Insulation Resistance: 500VDC 100MΩ(Min.)
Contact Resistance: 20mΩ Initial (Max.)
Function: DPST ON - OFF
Actuator Color: Black
Housing Color: Black
Printing Color: White

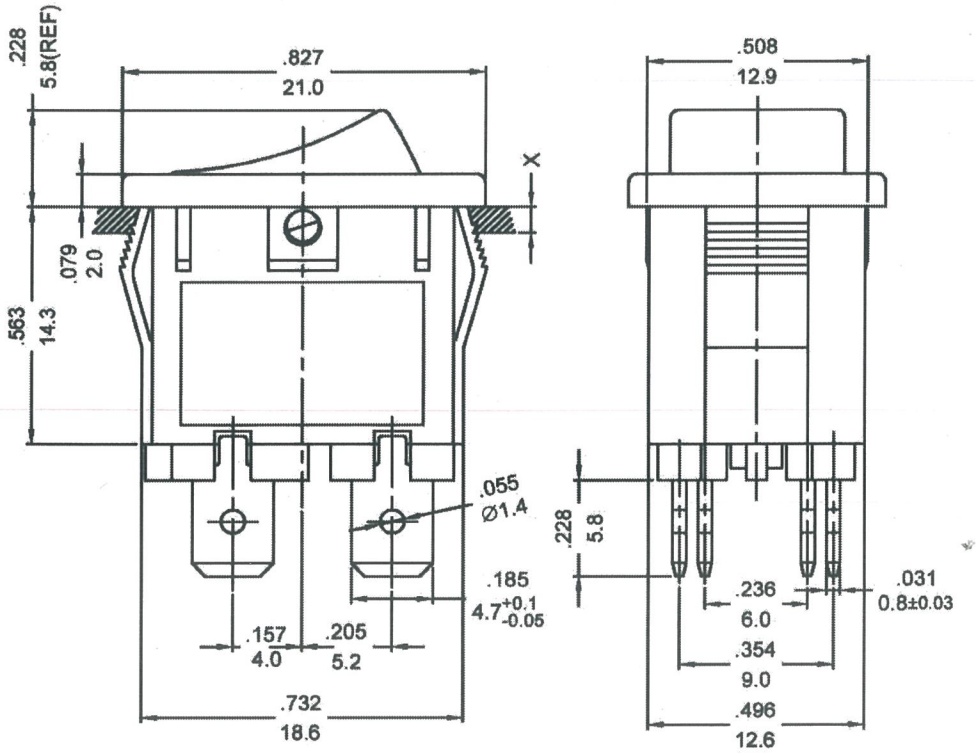



X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	19.2 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm
1.25~2mm	19.4 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm
2~3mm	19.8 $^{+0.1}_{-0}$ mm	12.9 $^{+0.15}_{-0}$ mm

PANEL CUTOUT DIMENSION TABLE

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

MR-210C5W-NBBC-1ANC

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: DW 7/16/26	Rev. 0	Unit: in/mm	Checked By: G.GULD
Title: ROCKER SWITCH		CW P/N: GMR210C5WNBBC	

MASTER