


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

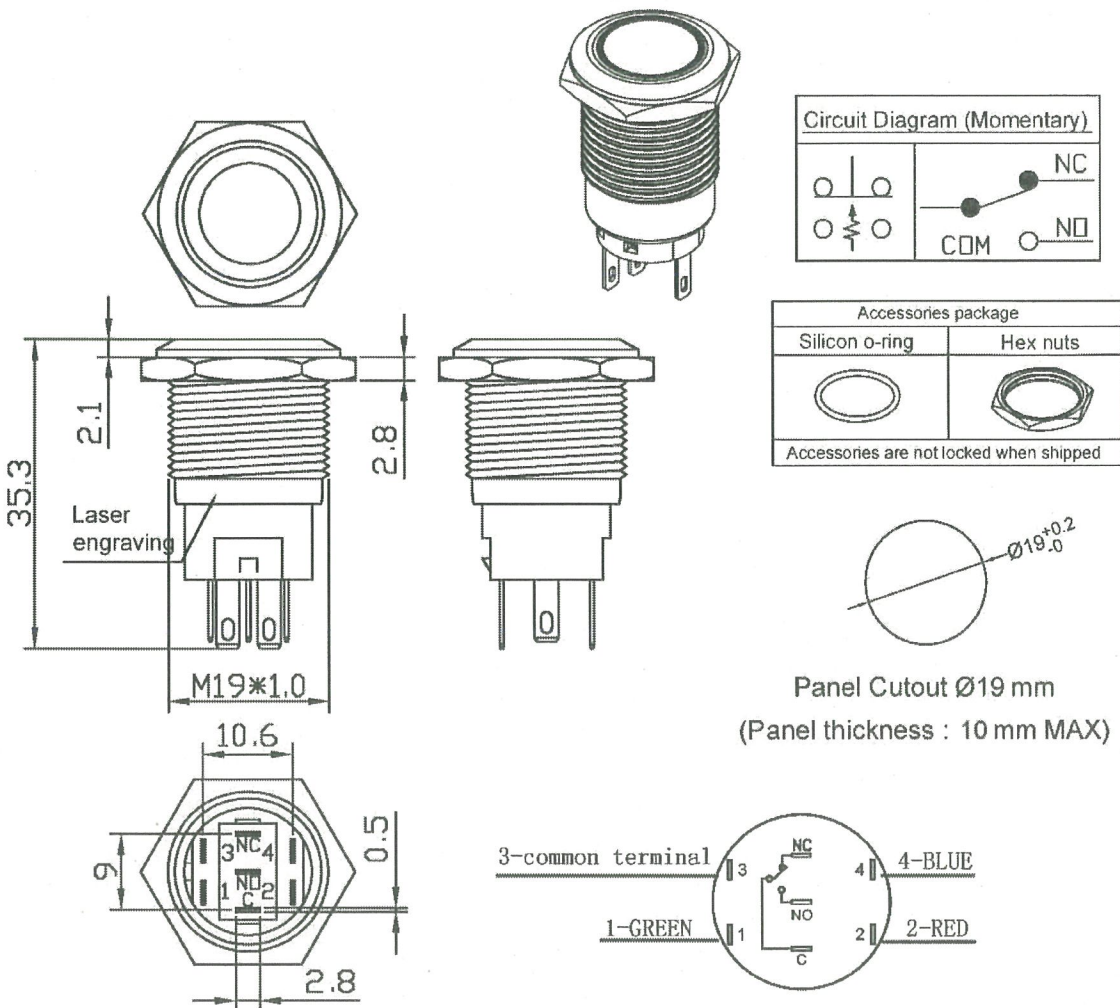

Rating: 6A 125/250V~μ 5E4
6A 3~ 48VDC μ 3E4
Contact Resistance: 50mΩ (max.) initial
Insulation Resistance: 100MΩ (min.)
Actuator Shape: Flat
Type: SPDT Momentary
Body Material: Aluminum Oxide/Color: Black
Actuator : Aluminum Oxide/Color: Black
Lens Style: Ring
LED Color: Red/Green/Blue
LED Voltage: 12VDC
Lens Color: White Transparent
Dielectric Strength: 500VAC for 1 minute
Mechanical Life: 1,000,000 cycles
Operation Force: 350g ± 150g
Total Travel: 3.2mm (max.)
Protection Level: IP68, IK10 (Above the panel)
Nut Torque: 5~14Nm

Accessories package	
Silicon o-ring	Hex nuts
Accessories are not locked when shipped	

Order Chart									
Series		LED Voltage		Body Material		Terminal Type			
GPA	19	M	13	F	E	1	3	A	S
Body Type		Circuit		Actuator Shape		LED & Lens Color			
Lens Style		LED & Lens Color		Terminal Type					

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± 0.5 (mm).

MASTER

PK-19M13FE13AS-ABTB-CW

CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: DW 7/24/25	Rev. 1	Unit: mm	Checked By: <i>G. GOLD</i>
	Title: PUSH BUTTON ANTI-VANDAL SWITCH 12V RED, GREEN, BLUE LED		CW P/N: GPA19M13FE13AS	