








THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

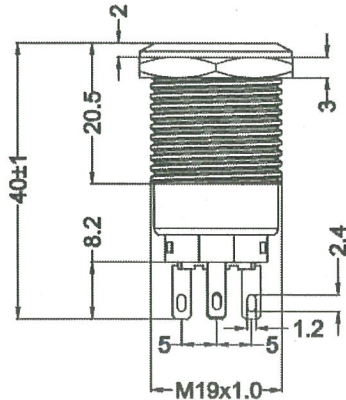

Accessories package	
Silicon o-ring	Hex nuts
Accessories are not locked when shipped	



Panel Cutout  $\varnothing 19$  mm  
(Panel thickness: 10 mm Max.)

Rating: 6A 125/250V~ $\mu$  5E4  
6A 3~ 48VDC  $\mu$  3E4

Contact Resistance: 50m $\Omega$  (max.) initial  
Insulation Resistance: 100M $\Omega$  (min.)

Actuator Shape: Flat

Type: SPDT Momentary

Body Material: Stainless Steel

Actuator: Stainless Steel

Lens Style: Ring

LED Color: White

LED Voltage: 12VDC

Lens Color: White

Dielectric Strength: 500VAC for 1 minute

Mechanical Life: 1,000,000 cycles

Operation Force: 350g  $\pm$  150g

Total Travel: 3.2mm (max.)

Protection Level: IP68, IK10 (Above the panel)

Nut Torque: 5~14Nm

**Order Chart**

Series	LED Voltage		Body Material		Terminal Type
GPA 19 M 13 F E W 3 S S					
Body Type			LED & Lens Color		
Circuit		Actuator Shape	Lens Style		

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED :  $\pm 0.5$  (mm).

**MASTER**

PK-19M13FEW3SS-ANTA-CW

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: DW 11/18/24 Rev. 3

Unit: mm

Checked By: *G. GULD*

Title: ILLUMINATED  
12V WHITE LED  
ANTI-VANDAL SWITCH

CW P/N:  
**GPA19M13FEW3SS**

3 Changed panel thk. from 14mm to 10mm.  
DW 10/29/25

2 Updated PK#  
DW 6/24/25

1 Updated notes & removed description of LED color & voltage chart. DW 3/5/25