THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

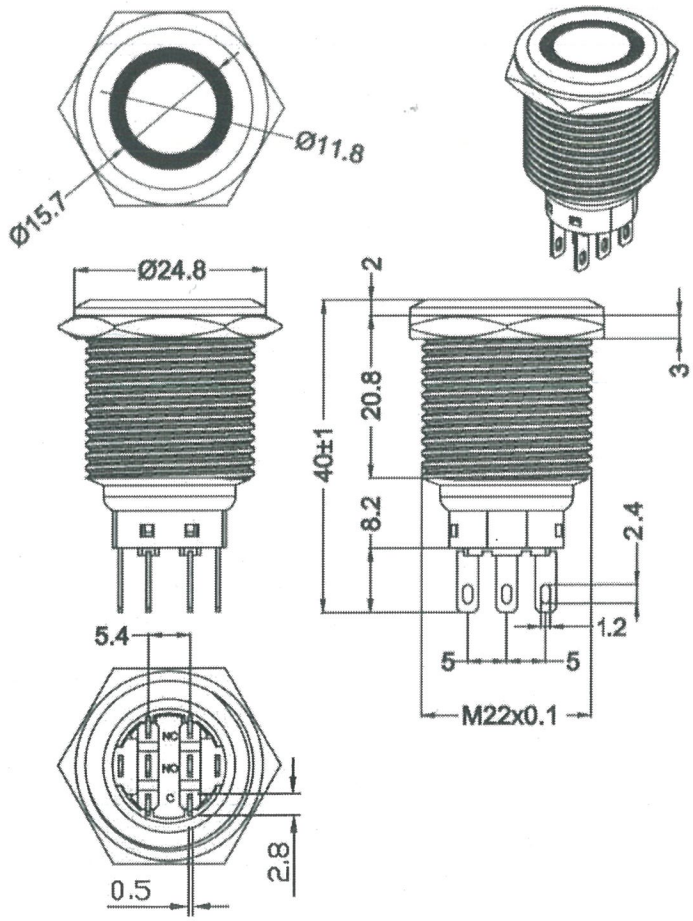

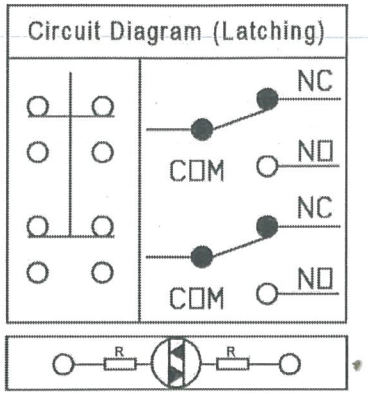

Accessories package	
Silicon o-ring	Hex nuts
Accessories are not locked when shipped	



Panel Cutout Ø22 mm
(Panel thickness : 14 mm MAX)

Rating: 6A 125/250V~ μ 5E4
6A 3~ 48VDC μ 3E4
Contact Resistance: 50mΩ (max.) initial
Insulation Resistance: 100MΩ (min.)
Actuator Shape: Flat
Type: DPDT, Latching
Body Material: Stainless Steel
Actuator: Stainless Steel
Lens Style: Ring
LED Color: Red
LED Voltage: 12 VDC
Lens Color: Red
Dielectric Strength: 500VAC for 1 minute
Mechanical Life: 1,000,000 cycles
Operation Force: 350g ± 150g
Total Travel: 3.2mm (max.)
Protection Level: IP68, IK10 (Above the panel)
Nut Torque: 5~14Nm

Order Chart

Series				LED Voltage			Body Material		
GPA	22	Z	23	F	E	R	3	S	S

Terminal Type
Body Type
Circuit
Lens Style
Actuator Shape
LED & Lens Color

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± 0.5 (mm).

MASTER

PK-22Z23-FER3SS-ANRA-CW

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: DW 11/19/24	Rev. 2	Unit: mm	Checked By: G. GULD
Title: ILLUMINATED 12V RED LED ANTI-VANDAL SWITCH		CW P/N: GPA22Z23FER3SS	

2	Redrawn. Corrected views. DW 10/01/25
1	Updated notes & removed description of LED color & voltage chart. DW 3/06/25