


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	10A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute	Thickness: 7.0mm max.	
Operation Temperature	-25°C ~ 85°C		
Switch Function	2P SPST OFF - ON		


**MATERIAL:**

Frame: Black, Nylon 66 (94-V2)  
 Actuator: PC Clear (94-V2), For Color Ref. "X"  
 in Actuator Color Chart and CW P/N.  
 Waterproof Rubber: Black, Silicone  
 Printed: None

Waterproof: IP65  
 Electrical life at full load: 20,000 cycles.



ACTUATOR COLOR	X
Amber	A
Black	B
Green	G
Red	R
Blue	U
White	W

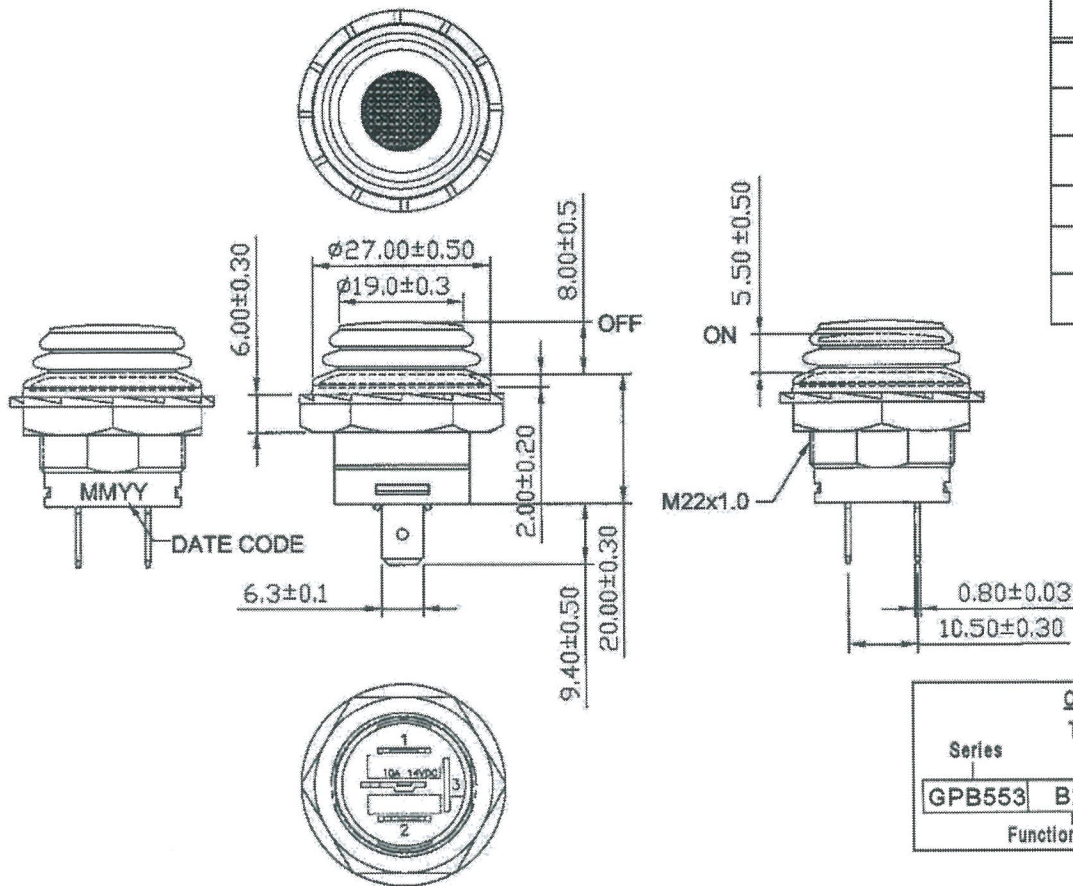

**ORDER CHART**

Series	Terminal Type	Frame Color
GPB553	B2 01	B X
Function		Actuator Color

RoHS Compliant

MASTER

R13-553B2-01-BX

1 | Removed logo & added order chart. DW 2/24/23

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 6-05-12

Rev. 1

Unit: mm

Checked By: *G. GULD*

Title: **PUSH BUTTON SWITCH**

CW P/N:

**GPB553B201BX**