THIS INFORMATION IS CONFIDENTIAL AND PROPIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING .....

Dwg. No. GR3-260C2BBNN

REVISIONS
0 New. DW 9/2/26 9/2/26

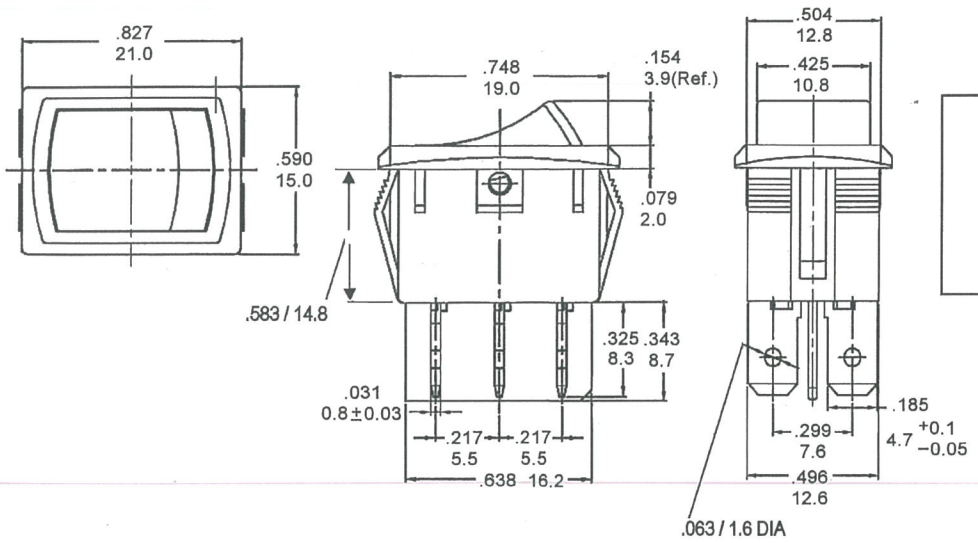

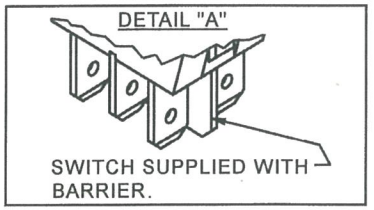



PANEL CUTOUT DIMENSION TABLE

X(CUTOUT DIMENSION)	Y(CUTOUT DIMENSION)	Z(PANEL THICKNESS)
$19.2^{+0}_{-0.1}$ mm	$12.9^{+0.15}_{-0}$ mm	0.75~1.25mm
$19.4^{+0}_{-0.1}$ mm	$12.9^{+0.15}_{-0}$ mm	1.25~2mm
$19.8^{+0}_{-0.1}$ mm	$12.9^{+0.15}_{-0}$ mm	2~3mm

SPECIFICATIONS:

RATING: 10A 125/250 VAC (UL/CUL)
10(4)A 250V ~ T85 (F1/ENEC16)

10A 125/250 VAC μ
FOR MOMENTARY FUNCTIONS

DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE

INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)

CONTACT RESISTANCE: 20 mΩ INITIAL (MAX)

ELECTRIC LIFE: 10,000 CYCLES MIN

MECHANICAL LIFE: 30,000 CYCLES MIN

TEMPERATURE RANGE: -20 TO +85 °C

BASE: NYLON 6/6,94V-2 MIN

ACTUATOR: NYLON 6/6,94V-2 MIN

MOVING CONTACT: SILVER PLATED COPPER ALLOY

TERMINALS: SILVER PLATED COPPER ALLOY

Reach and RoHS Compliant.

Item Number :

GR3 — 2 6 0 C 2 B B N N

SERIES	POLE	FUNCTION	TERMINAL TYPE	ROCKER TYPE	MARKING TYPE	BASE COLOR & BARRIER OPTION	ROCKER COLOR	WATERPROOF COVER	LEGEND
GR3	2 DOUBLE	6 (ON)-OFF-(ON) ( )=MOMENTARY	0 QUICK CONNECT	C CURVE	2 NO MARKING	B BLACK WITH BARRIER	B BLACK	N NONE	N NONE

OSLO SWITCH
CW Industries
A Unit of Electro Switch Corp.

TOLERANCES UNLESS OTHERWISE SPECIFIED

2 Place Decimal ± .010	METRIC
3 Place Decimal ± .005	1 Place Dec. ± .25mm
Angles ± 1°	2 Place Dec. ± .13mm

Made for: CW IND.
Drawn by: DW 9/2/26
Checked by: G. GULD 9-2-26
Approval: 9/2/26

Title: GR3 SERIES DOUBLE POLE (ON) - OFF - (ON)

Division: SWITCH

Dwg. No. GR3-260C2BBNN

MASTER