THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP	c UL us, SP
	10A 125VAC 6A 250VAC	VDE, D, N, S, FI
Contact Resistance	30m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 2500V 1 minute	
Operating Temperature	-20° C ~ 85° C	
Switch Function	2P SPST ON - OFF	

Mounting Hole



Thickness	X	Y
0.75...1.25	19.2-0.1	13+0.1
1.25...2	19.4-0.1	13+0.1
2...3	19.8-0.1	13+0.1

Circuit Diagram



MATERIAL:
Frame: Black, Nylon # 66
Actuator: Black, Nylon # 66
Printed: None

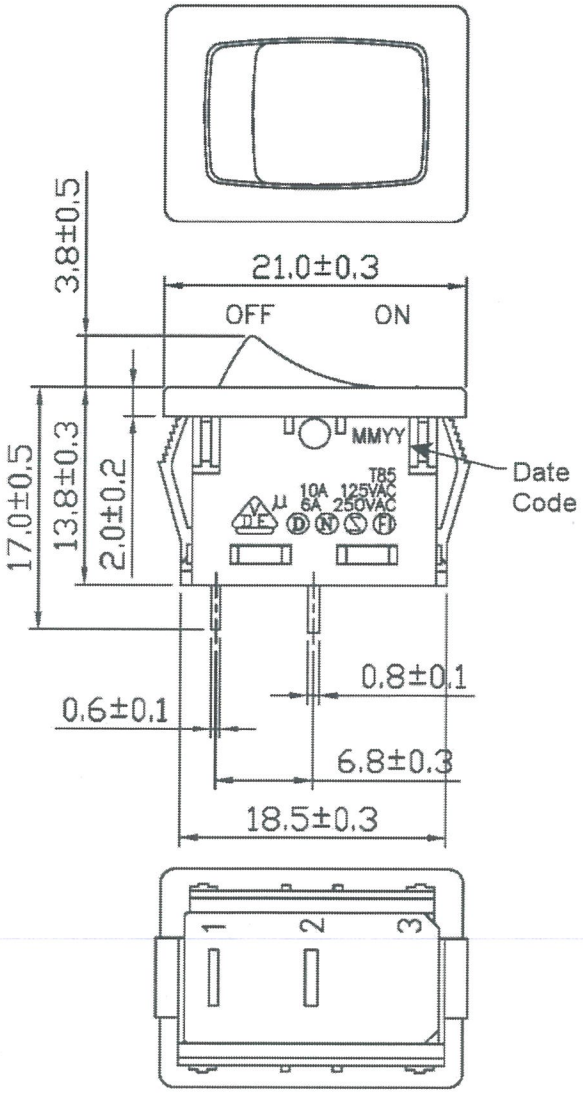

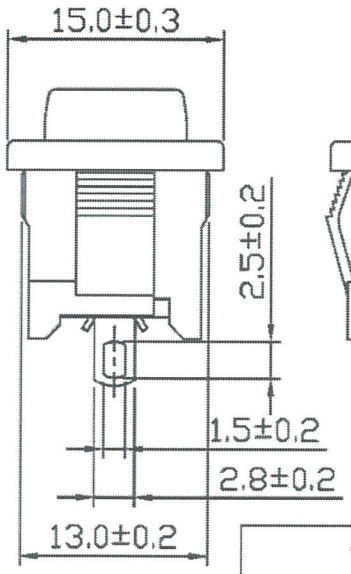



ORDER CHART

Switch Series	Terminal Style		Actuator Color	
GRB066	A	05	B	B
	Function			Frame Color

MASTER

R13-66A-05

2	Moved date code & CW p/n GRB066A05 is now GRB066A05BB. DW 8/7/24
1	Removed CW logo and added date code. APhilip 11/28/22

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn:	Rev.	Unit:	Checked By:
8/14/2018	2	mm	G. GULD

Title:	CW P/N:
ROCKER SWITCH	GRB066A05BB