



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

| | |
|-----------------------|---|
| Rating | 16A. 12V DC |
| Contact Resistance | 50m ohm max. |
| Insulation Resistance | DC 500V 100M ohm min. |
| Dielectric Strength | AC 1500V 1 minute |
| Operating Temperature | -20°C ~ 85°C |
| Switch Function | 2P SPST ON-OFF LED Independent |
| Lamp Type | LED Green @ 20mA, If=2.2VDC No Resistor |

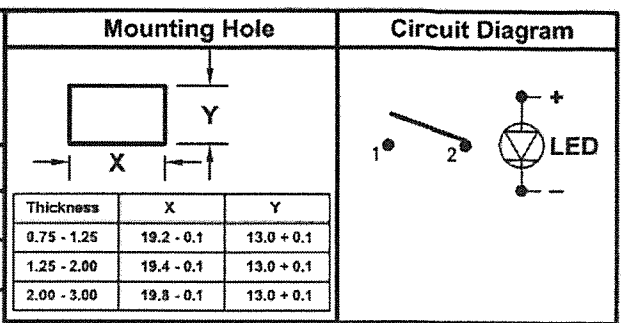

Material:
 Frame: Nylon #66, Black
 Actuator: Nylon #66, Black
 LED Lens: PC, Green

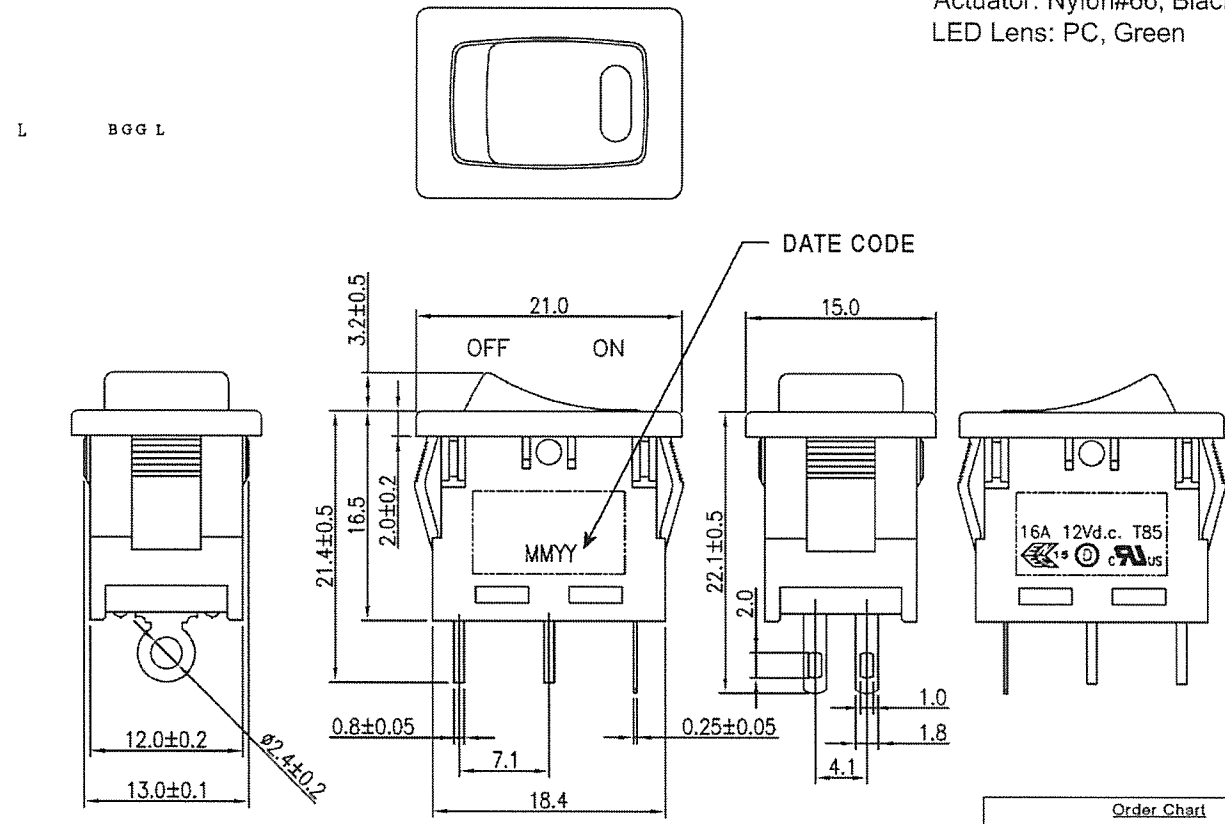

| Order Chart | |
|-------------|----------------|
| Series | Terminal Type |
| GRB066 | L 1 2 |
| Function | Actuator Color |
| B | L 1 |
| Frame Color | Lamp Type |
| B G G L | 1 |
| Voltage | |

Tolerances Unless Otherwise Specified +/- 0.3mm.

RoHS Compliant

R13-66L-12-BBGG-L1 | 5 | Removed CW logo and added order chart | APhilip 11/28/22

| | | | | |
|--|-----------------------------|--------|--------------------------------|---------------------|
| <p>Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p> | Date Drawn: 2/28/17 | Rev. 5 | Unit: mm | Checked By: G. GOLD |
| | Title: ROCKER SWITCH | | CW P/N: GRB066L12BBGGL1 | |