
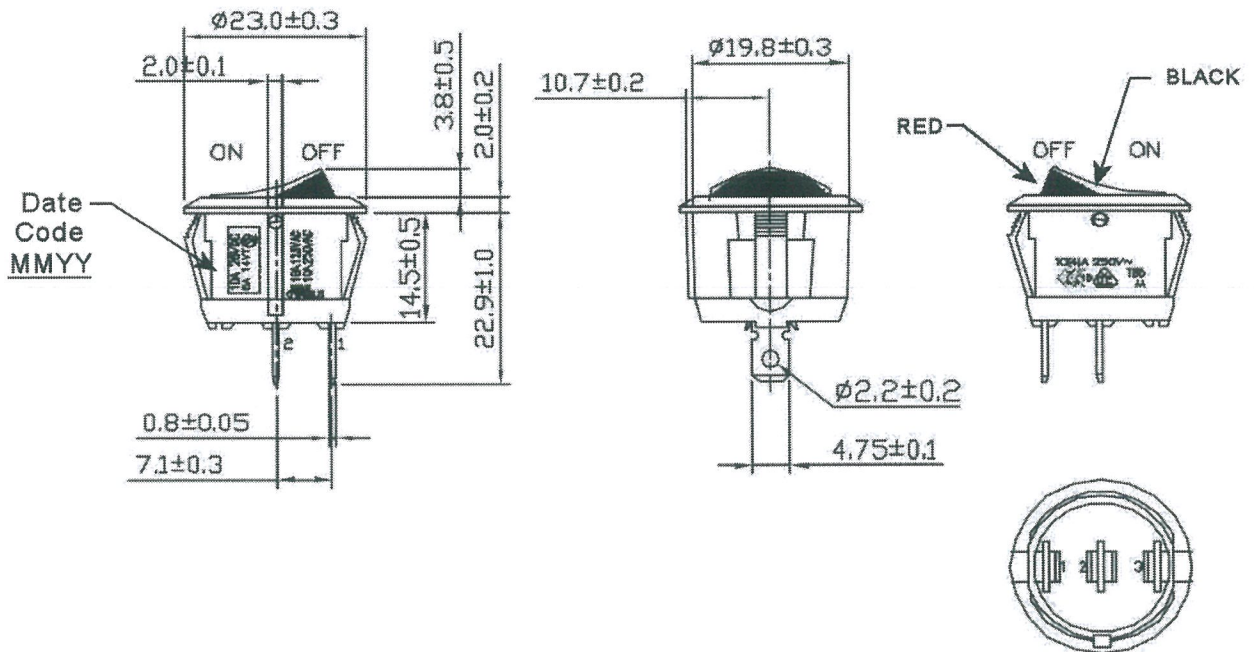
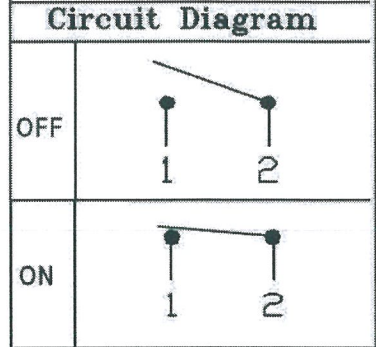


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 125VAC, 10A 250VAC	Mounting Hole
	10A 28VDC, 6A 16VT	
	10(4)A 250V~	
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temp.	-25° C ~ 85° C	
Switch Function	2P SPST ON-OFF	

Frame: Black, Nylon 66 (94-V2)  
 Actuator: Black/Red, Nylon 66 (94-V2)  
 Terminals: Silver plated, Copper alloy



Tolerances Unless Otherwise Specified ±0.3

RoHS Compliant

R13-112A2B-02

1 Removed CW logo, relocated date code. DW 11/18/22

**MASTER**

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 6-10-16

Rev. 1

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB112A2B02**