


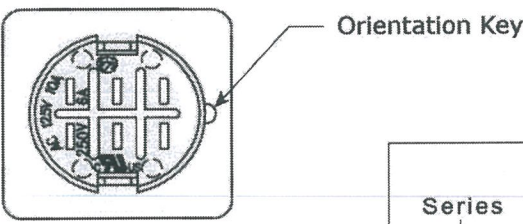
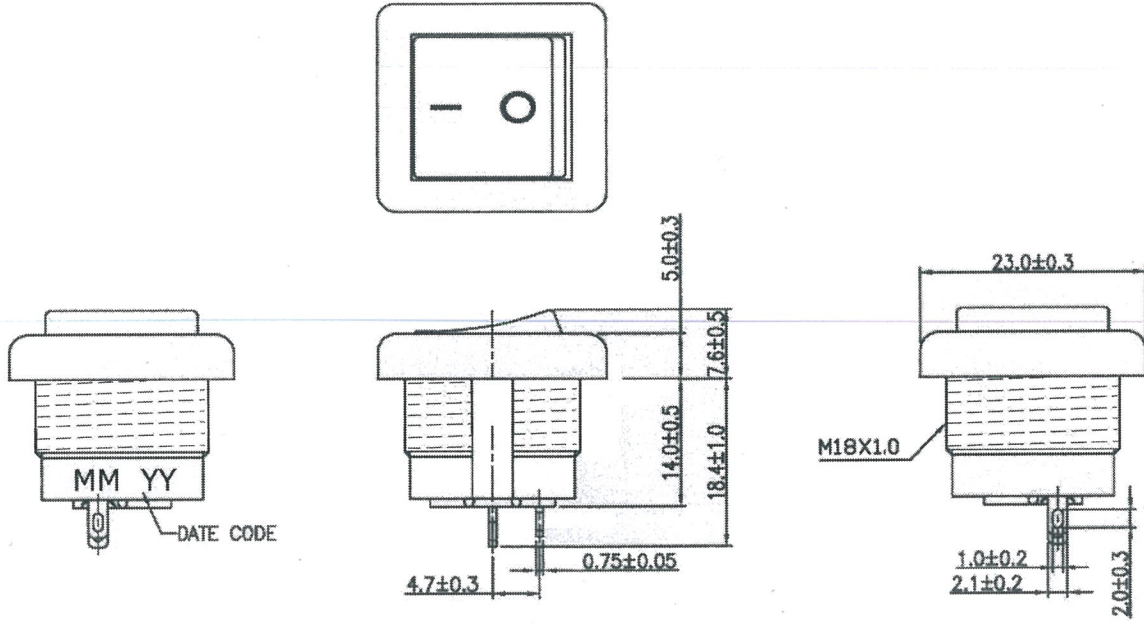


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	10A 125V, 6A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm max.			
Insulation Resistance	DC 500V 100M ohm min.			
Dielectric Strength	AC 1500V 1 minute			
Switch Function	2P SPST ON-OFF			


BASE COLOR: Black  
 BUTTON COLOR: Red  
 PRINTED: White, hot stamping



ORDER CHART	
Series	Function
GRB 136 A 05 B R 2	Marking
Rocker Style	Rocker Color
Terminal Style	Base Color

RoHS Compliant

R13-136A-05-BR2 **MASTER** 1 | Removed logo and added order chart. DW 2/27/23.

 <b>CW INDUSTRIES</b> Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 12/17/13	Rev. 1	Unit: mm	Checked By: <i>G. GOLD</i>
	Title: <b>ROCKER SWITCH</b>		CW P/N: <b>GRB136A05BR2</b>	