


	X	Y
1.0~1.5	37.3 <sup>+0.0</sup> <sub>-0.1</sub>	21.2 <sup>+0.1</sup> <sub>-0.0</sub>
2.5~3.0	37.5 <sup>+0.0</sup> <sub>-0.1</sub>	21.2 <sup>+0.1</sup> <sub>-0.0</sub>
3.5~4.5	37.7 <sup>+0.0</sup> <sub>-0.1</sub>	21.2 <sup>+0.1</sup> <sub>-0.0</sub>

Panel Cut-out



**SPECIFICATIONS:**

Rating: 16(8)A 125/250VAC  
25A 12V DC

Function: (ON) - OFF SPST ( ) = Momentary  
Pos 1 Pos 2

Contact Resistance: 20mΩ max. (initial)  
Insulation Resistance: 100mΩ min. (at 500V DC)  
Dielectric Strength: 1,500V AC 50/60 Hz for 1 minute  
Operating Temp. : -40° C to 85° C  
Service Life: Mechanically: 100,000 operations min.  
Electrically: 30,000 operations min.



Water Proof: IP67

Base Color: Gray


Actuator Color: Black

Insulation Materials: 94V-2 Thermoplastic

Contact Materials: Copper Alloy

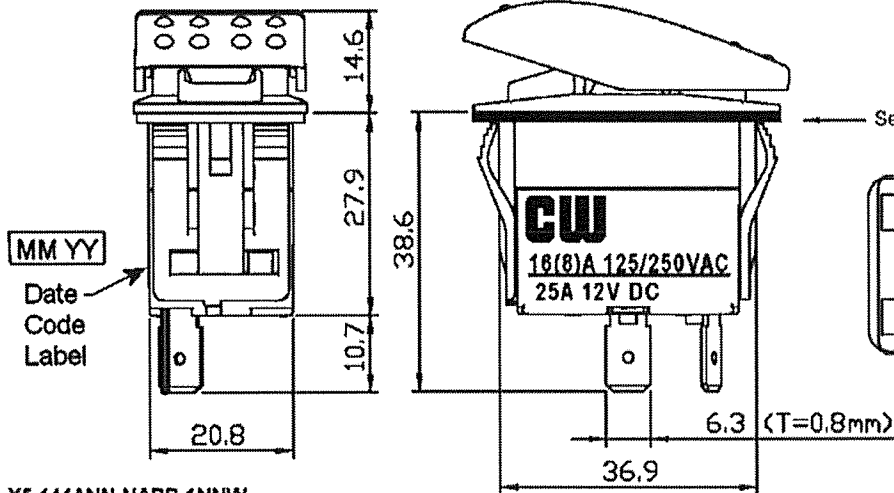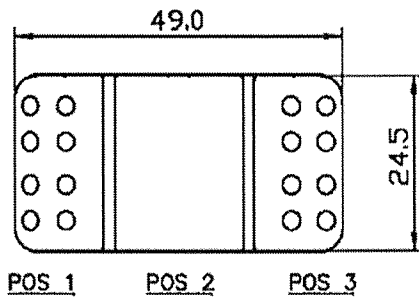

Tolerances unless otherwise specified: 0.3mm.

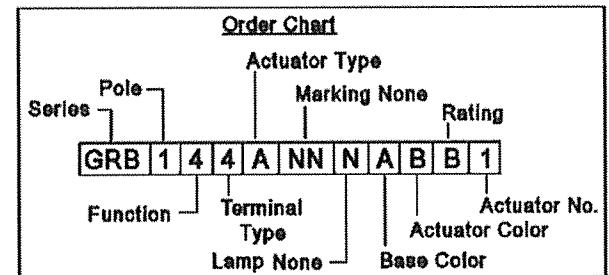

X5-144ANN-NABB-1NNW

<p><b>CW INDUSTRIES</b> Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p>	Date Drawn: 4/15/14	Rev. 1	Unit: mm	Checked By: <i>G. GOLD</i>	<p>1 Redrawn. Added new panel cutout, bottom view, IP 67 was 68 &amp; order chart. Removed iso view. Updated all views. DW 3-28-18</p>
	Title: <b>ROCKER SWITCH</b>		CW P/N: <b>GRB144ANNABB1</b>		