

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	6A 125V, 3A 250V AC		
Contact Resistance	50m ohm max.		
Insulation Resistance	DC 500V 100M ohm min.		
Dielectric Strength	AC 1000V 1 minute		
Switch Function	2P SPST ON - OFF		

Cut Out .236 [6.0mm] Thk. Max.

Material:

Frame: Nylon #66, Black
 Actuator: Nylon #66, Black
 Printing: None

Wire Specification: 1 Red and 1 Black
 18 AWG. UL Type 1007
 Temp. Range: -40°C to 105°C
 Voltage Rating: 300 Volts
 Insulation: .016" Thk.
 Nominal O.D. : .082" Dia.
 Stripped Ends: Solder Coated

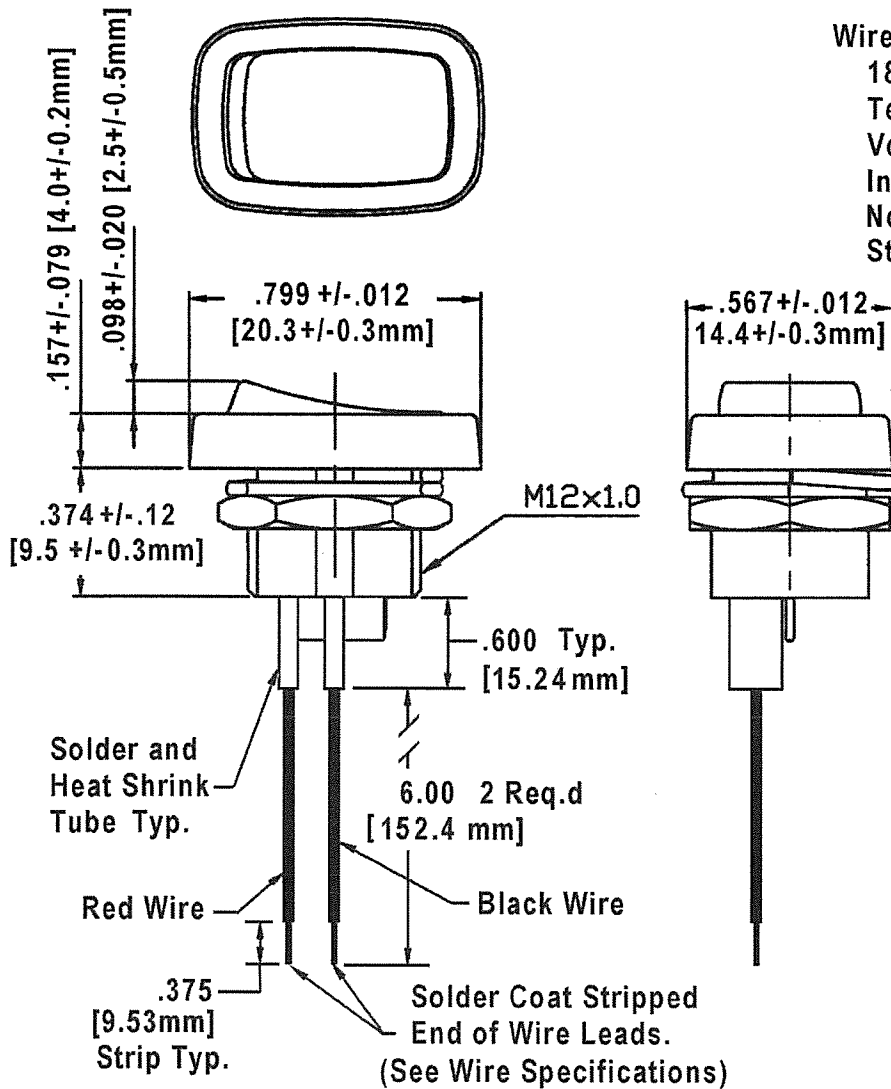

Order Chart					
Series	Terminal Style		Wire Leads		
GRB213	A	03	B	B	-WL
Function	Frame Color	Actuator Color			

3	Redrawn. Removed Logo. DW 3/07/23.
2	Added Solder coat stripped end of wire leads. DW 7/28/21.
1	6.00 was 4.00 for wire length. DW 5/27/21

R13-213A-03-BB

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: DW 5/11/21

Rev. 3

Unit: In. [mm]

Checked By: *G. GULD*

Title: **ROCKER SWITCH WITH WIRE LEADS**

CW P/N: **GRB213A03BB-WL**