








THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	8A 125V AC, 4A 250V AC	 	Mounting Hole		 SPST (ON) - OFF () = Momentary									
	10A 125V AC, 6A 250V AC 10A 28V DC, 6A 14 VT													
	6A 250V ~  	<table border="1"> <thead> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75 - 1.25</td> <td>19.2 - 0.1</td> <td>7.0 + 0.1</td> </tr> <tr> <td>1.25 - 2.00</td> <td>19.4 - 0.1</td> <td>7.0 + 0.1</td> </tr> <tr> <td>2.00 - 3.00</td> <td>19.8 - 0.1</td> <td>7.0 + 0.1</td> </tr> </tbody> </table>		Thickness		X	Y	0.75 - 1.25	19.2 - 0.1	7.0 + 0.1	1.25 - 2.00	19.4 - 0.1	7.0 + 0.1	2.00 - 3.00
Thickness	X	Y												
0.75 - 1.25	19.2 - 0.1	7.0 + 0.1												
1.25 - 2.00	19.4 - 0.1	7.0 + 0.1												
2.00 - 3.00	19.8 - 0.1	7.0 + 0.1												
Contact Resistance	50m ohm max.													
Insulation Resistance	DC 500V 100M ohm min.													
Dielectric Strength	AC 1500V 1 minute													
Operating Temperature	-25°C ~ 85°C													
Switch Function	2P SPST (ON)-OFF													

Material:
 Frame: Nylon#66, Black
 Actuator: Nylon#66, Black
 Printed: None

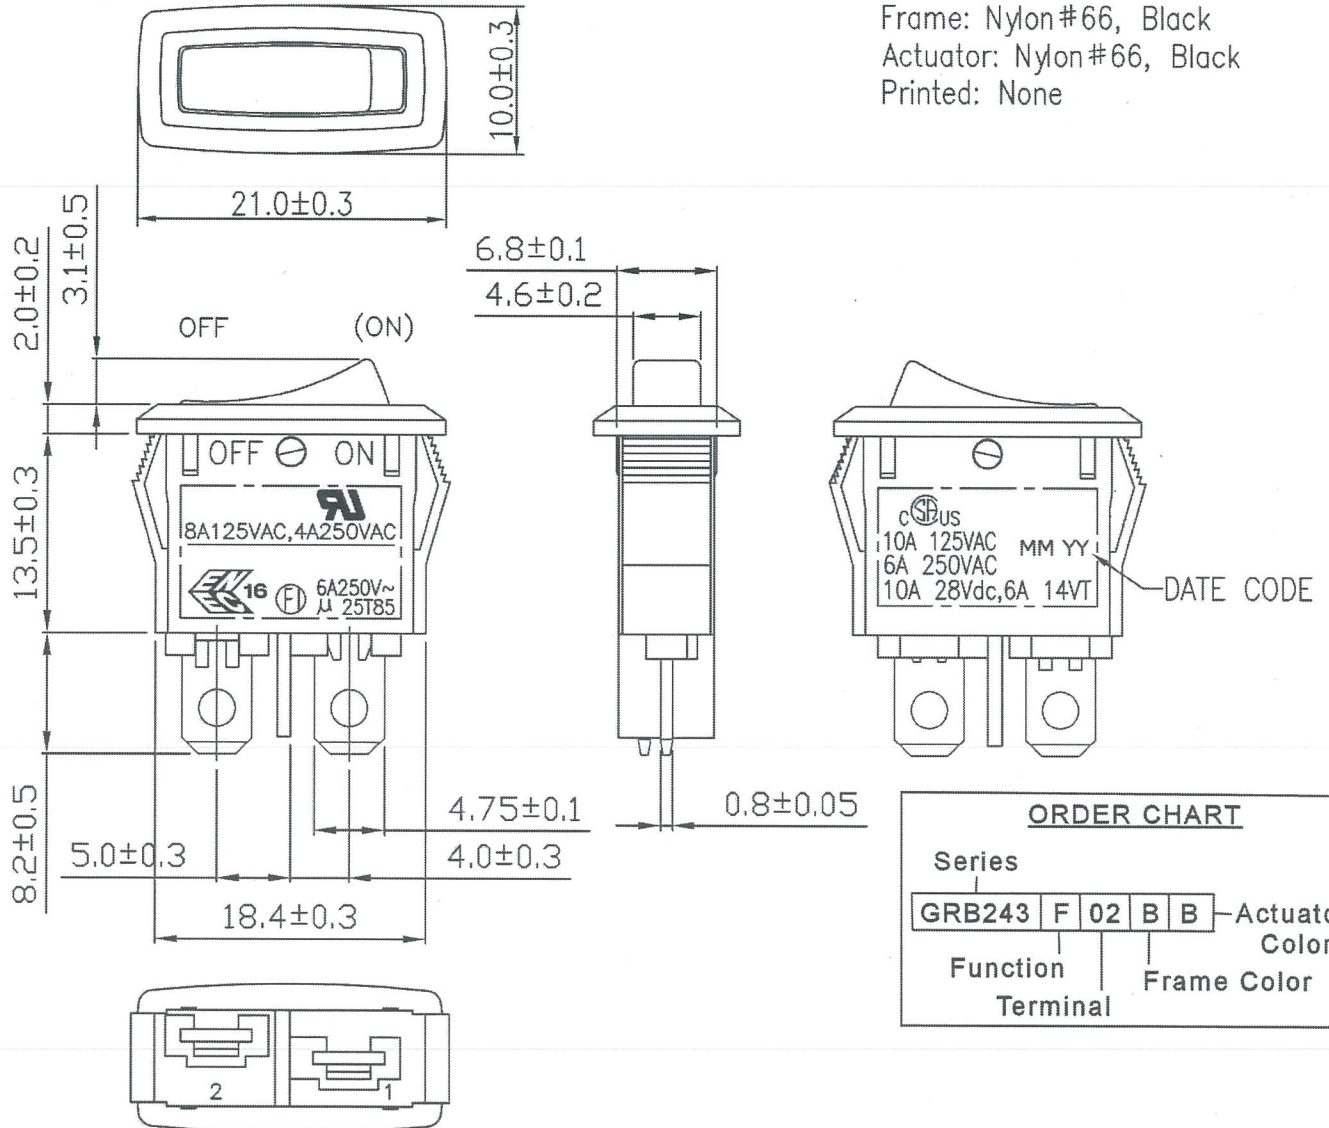

ORDER CHART					
Series	GRB243	F	02	B B	Actuator Color
Function					Frame Color
Terminal					

RoHS Compliant

MASTER

R13-243F-02

2	Redrawn. Removed Logo & added Order chart. DW 3/08/23.
1	Updated drawing. Rotated button to opposite direction. 7/22/10

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 12/21/09	Rev. 2	Unit: mm	Checked By: <i>G. GULD</i>
----------------------	--------	----------	----------------------------

Title: ROCKER SWITCH	CW P/N: GRB243F02BB
-----------------------------	----------------------------