




# GRB244 SERIES MINI ROCKER SWITCH

\* MATERIAL: Frame is nylon (UL flame: 94V-2).  
 Terminals are silver plated brass.

\* Illuminated actuators are molded in PC, available in Red, Amber, Green or White colors.

\* Snap-in mounting, easy to install switch into panel.


\* Watertight cover is optional.

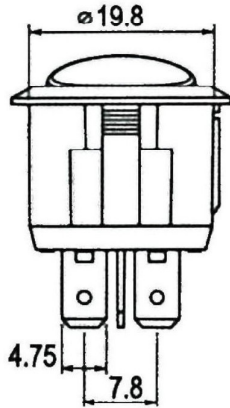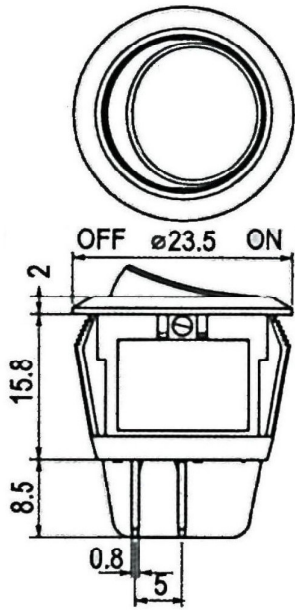

IP55 Watertight Cover Optional



## FUNCTION

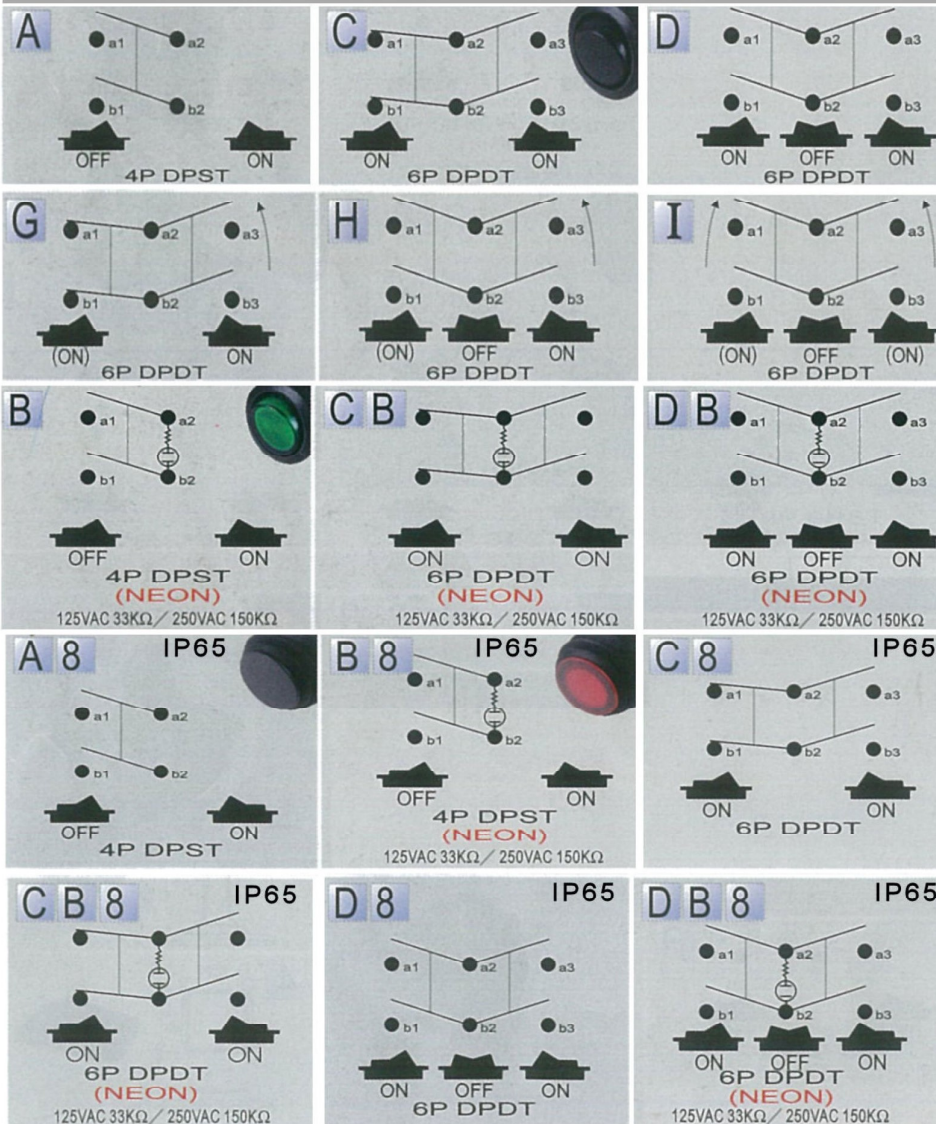


<b>Rating</b>
16A 125V AC/10A 250V AC 10(4)A 250V AC
<b>Contact resistance</b>
50mΩ Max
<b>Insulation resistance</b>
DC 500V 100MΩ Min
<b>Dielectric strength</b>
AC 1500V 1 minute

## TERMINAL


0 2 □ .187" SQ

## CUT OUT



0.7~3.0 mm max

## CUT OUT for IP65



0.7~2.5 mm max

## ACTUATOR STYLE

