
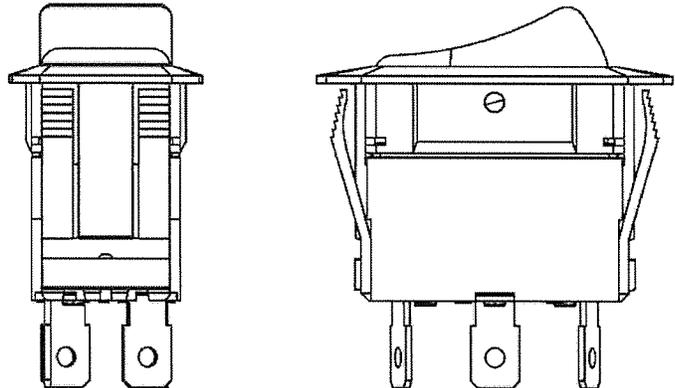


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125VAC 20A 125VAC	T85 cRU _{US} ④	Mounting Hole			Circuit Diagram
Contact Resistance	50m ohm Max.		Thickness(mm)	X(mm)	Y(mm)	
Insulation Resistance	DC 500V 100M ohm Min.		0.75~1.25	21.2±0.1	36.6 ^{+0.2} _{-0.1}	
Dielectric Strength	AC 1500V 1 minute		1.25~2.0		36.8 ^{+0.2} _{-0.1}	
Operation Temperature	-20°~85°		2.0~3.0		37.0 ^{+0.2} _{-0.1}	
Switch Function	3P SPST ON-OFF LAMP Dependent					
Lamp Type	NEON 125VAC w/resistor					

MATERIAL:

- Frame: Nylon 66, Black
- Actuator: Nylon 66 with 33%GF, Black
- Lens: PC, Red
- Lamp: Neon, Red
- Water proof and dust proof to fit IP-56

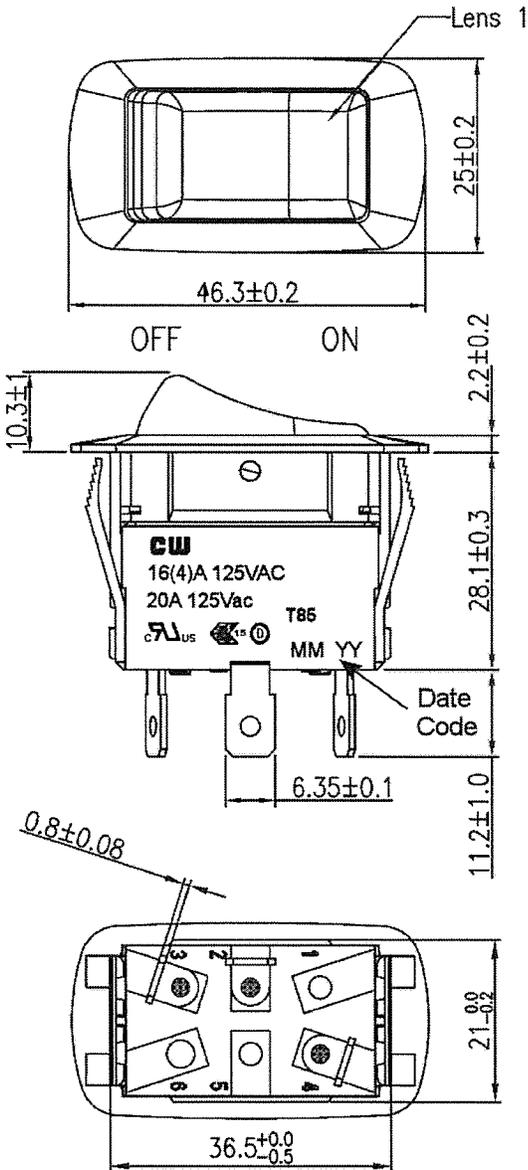

Order Chart									
Series		Actuator Type		Terminal Type		Lens 1 Color		Voltage	
GRB260	A	4	01	B	B	R	N	2	
Function		Frame Color		Actuator Color		Lens 2 Color		None	

R13-260A4-01-BBRN-71100

5 Updated ratings. 2/09/18.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/24/11

Rev. 5

Unit: mm

Checked By: *G. GOLD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260A401BBRN2**