


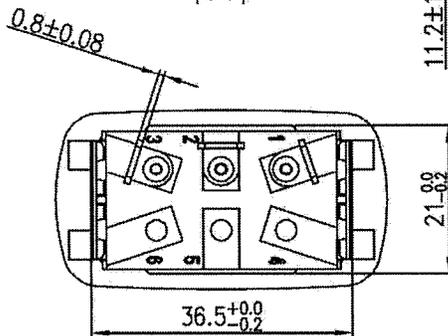
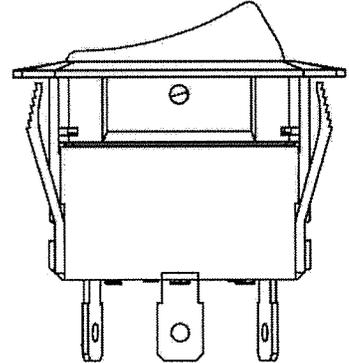
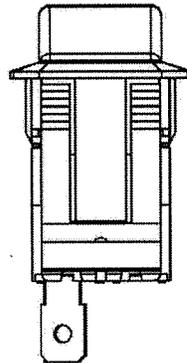
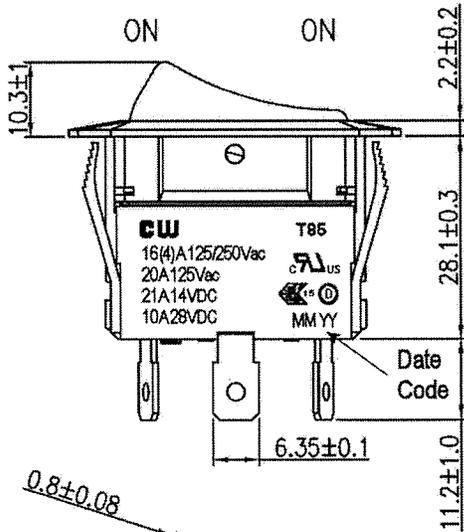


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125/250VAC 20A 125VAC 21A 14VDC / 10A 28VAC	Mounting Hole	Circuit Diagram	
	T85  			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute	Thickness(mm)	X(mm)	Y(mm)
Operation Temperature	-20°~+85°	0.75~1.25	21.2±0.1	36.6 ^{+0.2}
Switch Function	3P SPDT ON-ON	1.25~2.0		36.8 ^{+0.2}
		2.0~3.0		37.0 ^{+0.2}

MATERIAL:

- Frame: Nylon#66, Black
- Actuator: Nylon#66 with 33%GF, Black
- Printing: White
- Water Proof and dust proof to fit IP-56

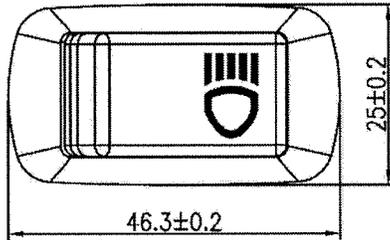

Order Chart									
Series	Function	Actuator Type	Terminal Type	Frame Color	Actuator Color	No Lens	No Bulb	Special Marking	
GRB260	C	1	01	B	B	N	N	S	

R13-260C1-01-BBNN-S

1 Updated ratings. 2/08/18.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/25/12

Rev. 1

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260C101BBNNS**