
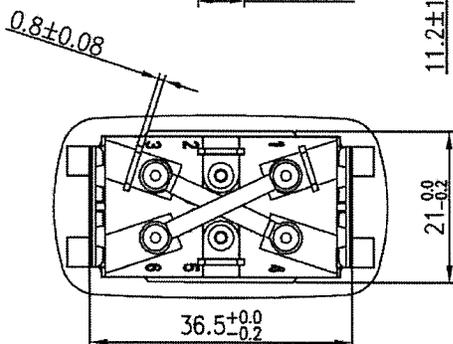
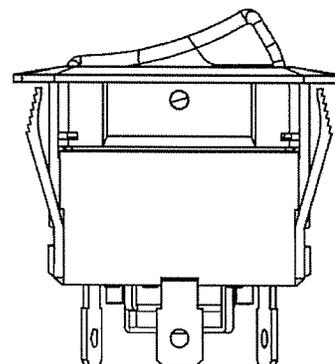
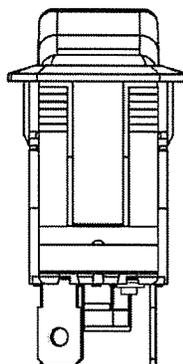
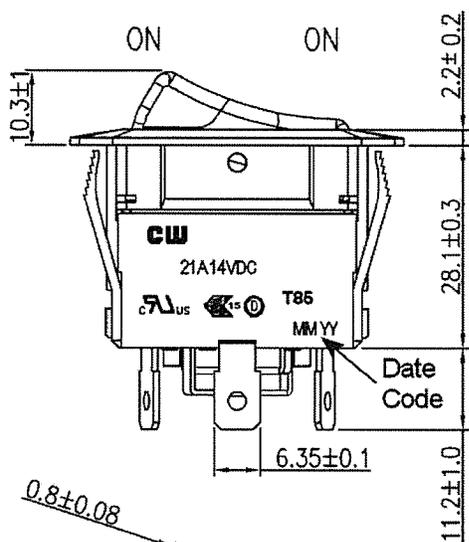


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	21A 14VDC	T85	Mounting Hole 	Circuit Diagram 	
Configured For	12VDC 14V				
Contact Resistance	50m ohm Max.		Thickness(mm)	X(mm)	Y(mm)
Insulation Resistance	DC 500V 100M ohm Min.		0.75~1.25	21.2±0.1	36.6 ^{+0.2}
Dielectric Strength	AC 1500V 1 minute		1.25~2.0		36.8 ^{+0.2}
Operation Temperature	-20°~85°		2.0~3.0		37.0 ^{+0.2}
Switch Function	4P SPDT ON-ON Lamp Dependent				
Lamp Type	Bulb 12VDC 14V				

MATERIAL:

- Frame: Nylon#66, Black
- Actuator: Nylon#66 with 33%GF, Black
- Lens 1: PC, Red
- Lens 2: PC, Green
- Water proof and dust proof to fit IP-56

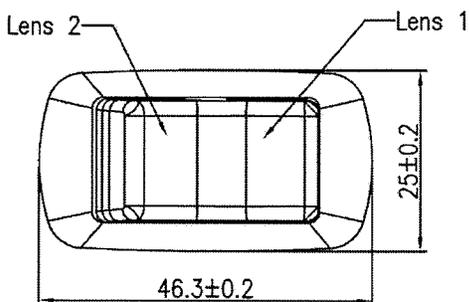

Order Chart							
Series	Actuator Type	Terminal Type	Lens 1 Color		Lens 2 Color		Voltage
GRB260	C	5 01	B	B	R	G	1
Function	Frame Color	Actuator Color					

R13-260C5-01-BBRG-92600

3 Updated ratings. 2/12/18.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 5/19/10

Rev. 3

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260C501BBRG1**