







THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125/250Vac 20A 125Vac 21A 14VDC / 10A 28VDC	T85 			Mounting Hole 	Circuit Diagram 
	Contact Resistance	50m ohm Max.	Thickness(mm)	X(mm)		
Insulation Resistance	DC 500V 100M ohm Min.	0.75~1.25	21.2±0.1	36.6 ^{+0.2} _{-0.1}		
Dielectric Strength	AC 1500V 1 minute	1.25~2.0		36.8 ^{+0.2} _{-0.1}		
Operation Temperature	-20°~+85°	2.0~3.0		37.0 ^{+0.2} _{-0.1}		
Switch Function	3P SPDT (ON)-OFF-(ON)					

() = Momentary Function

MATERIAL:

Frame: Nylon#66, Black
 Actuator: Nylon#66 with 33%GF, Black
 Printed: None
 Water proof and dust proof to fit IP-56

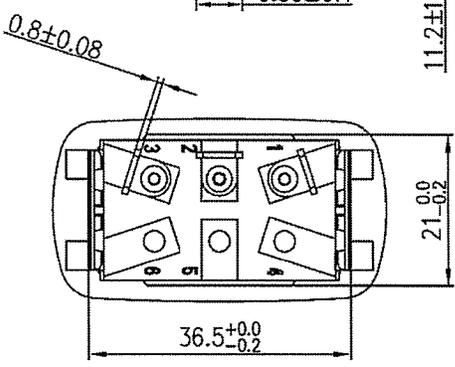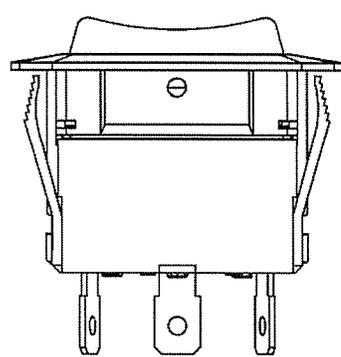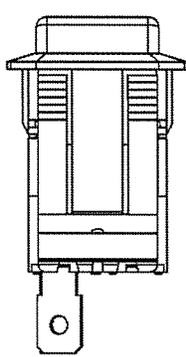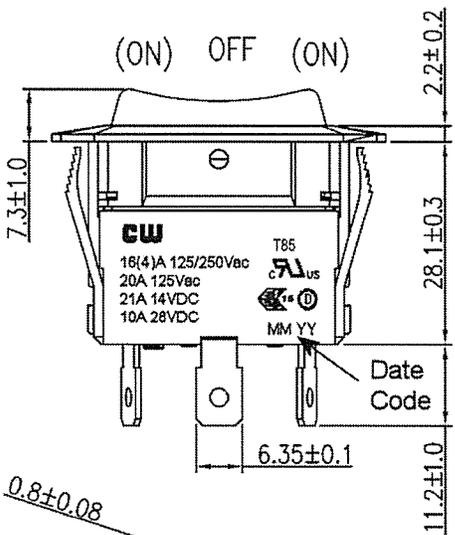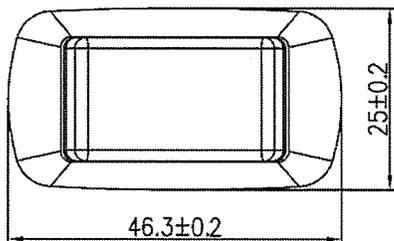

Order Chart							
Actuator Type							
Terminal Type							
Series	Function		Frame Color	No Bulb		No Marking	
GRB260	G	1	01	B	B	N	N
Actuator Color							

R13-260G1-01-BB

2 Updated ratings. 2/07/18.
 1 20A 125VAC 10A 250VAC was 20A 125VAC 10A 25VAC IN RATING. 1/24/11.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/24/11

Rev. 2

Unit: mm

Checked By: *G. GOLD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260G101BBNN**