






THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	20A 125VAC 10A 250VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP 21A 14VDC	<b>Mounting Hole</b> 			<b>Circuit Diagram</b> 						
	<b>Contact Resistance</b> 50m ohm Max. <b>Insulation Resistance</b> DC 500V 100M ohm Min. <b>Dielectric Strength</b> AC 1500V 1 minute <b>Operation Temperature</b> -20°~+85° <b>Switch Function</b> 3P SPDT (ON)-OFF-(ON)					<table border="1"> <tr> <th>Thickness(mm)</th> <th>X(mm)</th> <th>Y(mm)</th> </tr> <tr> <td>0.75~1.25</td> <td rowspan="3">21.2±0.1</td> <td>36.6<sup>+0.2</sup></td> </tr> <tr> <td>1.25~2.0</td> <td>36.8<sup>+0.2</sup></td> </tr> <tr> <td>2.0~3.0</td> <td>37.0<sup>+0.2</sup></td> </tr> </table>	Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.2±0.1
Thickness(mm)	X(mm)	Y(mm)									
0.75~1.25	21.2±0.1	36.6 <sup>+0.2</sup>									
1.25~2.0		36.8 <sup>+0.2</sup>									
2.0~3.0		37.0 <sup>+0.2</sup>									

( ) = Momentary Function

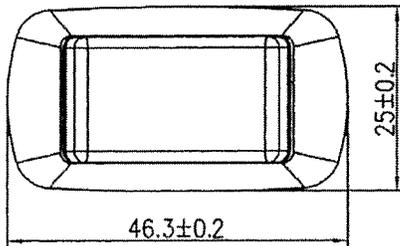

**MATERIAL:**  
 Frame: Nylon#66, Black  
 Actuator: Nylon#66 with 33%GF, Black  
 Printed: None  
 Water proof and dust proof to fit IP-56

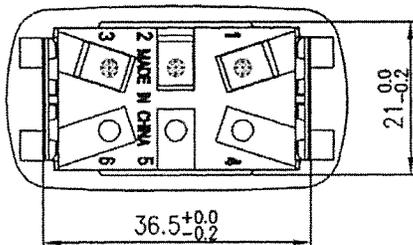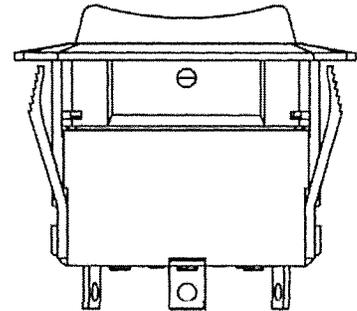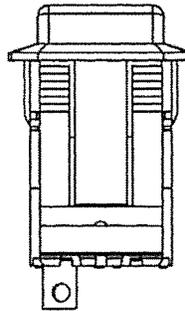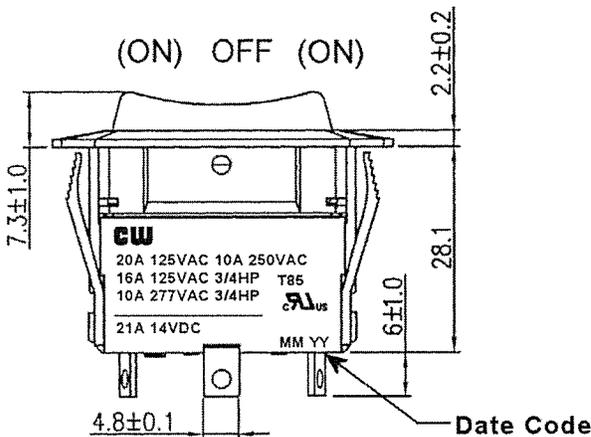

Order Chart							
Series		Actuator Type		Terminal Type		No Bulb	
GRB260	G	1	05	B	B	N	N
Function		Frame Color		Actuator Color		No Marking	

Tolerances +/-0.3 Unless Otherwise Specified.

R13-260G1-05-BBNN

**cw INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 3/24/2021

Rev. 0

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260G105BBNN**