

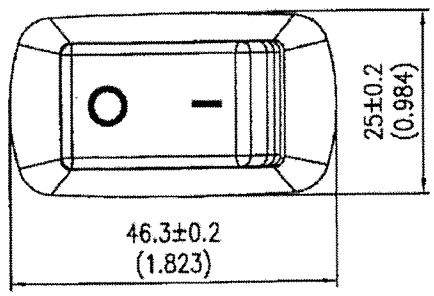

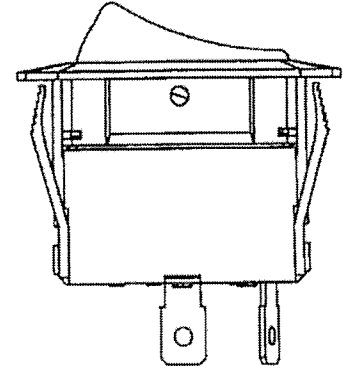
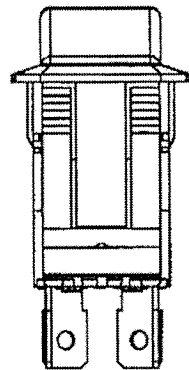
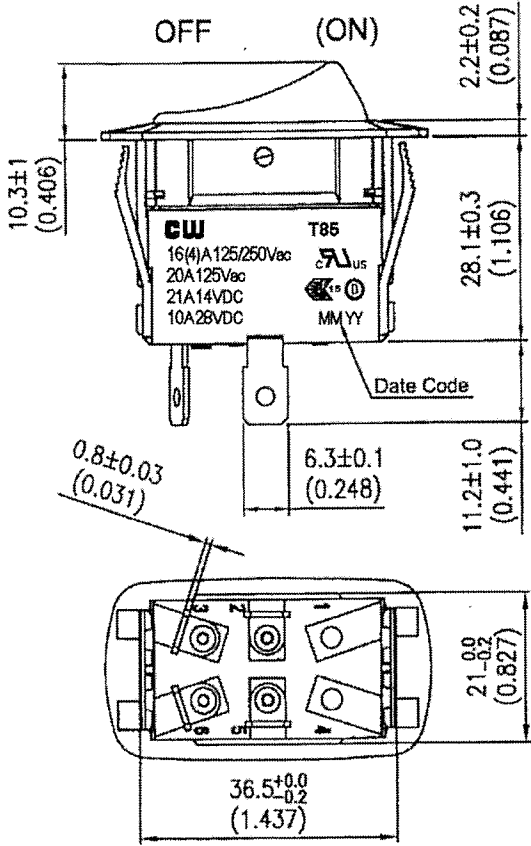


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125/250VAC 20A 125VAC 21A 14VDC / 10A 28VAC	T85 	Mounting Hole		Circuit Diagram
	Contact Resistance		50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		Thickness(mm)	X(mm)	Y(mm)
Dielectric Strength	AC 1500V 1 minute		0.75~1.25	21.2+0.1	36.6 ^{+0.2}
Operation Temperature	-20°~85°		1.25~2.0		36.8 ^{+0.2}
Switch Function	4P DPST (ON) - OFF		2.0~3.0		37.0 ^{+0.2}



MATERIAL:
 Frame: Black, Nylon 66
 Actuator: Black, Nylon 66 with 33%GF
 Printed: White, Hot Stamping
 Dust Proof and Water Proof to fit IP-56



Order Chart						
Series	Actuator Type	Terminal Type	Voltage			
GRB260	S	1	01	B	B	1 72
Function	Frame Color	Actuator Color				

R13-260S1-01-BBNN-1N-0072

1 Updated ratings. 2/09/18.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 12-03-14

Rev. 1

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB260S101BB172**