



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125/250Vac 20A 125Vac 21A 14VDC / 10A 28VDC	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			SEE CHART
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute	Thickness(mm)	X(mm)	
Operation Temperature	-20°~+85°	0.75~1.25	21.2+0.1	
Switch Function	SEE CHART	1.25~2.0	36.8 ^{+0.2}	
		2.0~3.0	37.0 ^{+0.2}	

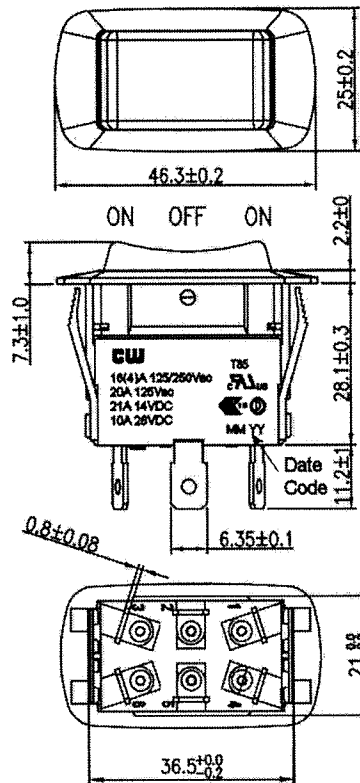

Frames are Nylon with glass fiber (UL flame: 94HB).
 Terminals are Silver plated brass.
 Illuminated actuators are molded in PC, available in Red, Amber or Green Colors.
 Waterproof and dustproof to fit IP-56.

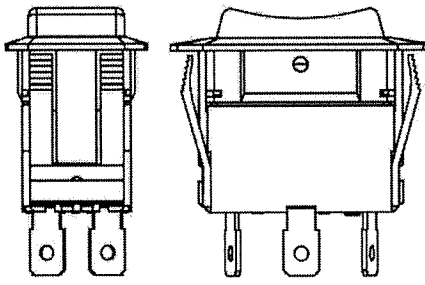


Series	Terminal Type	LED Color	Printing Lamp Type	Voltage
GRB260				
Function	Actuator Type	Actuator / Lens Color	Frame Color	

Button Styles

- 1
- 2
- 4
- 5
- 6
- 7

Function

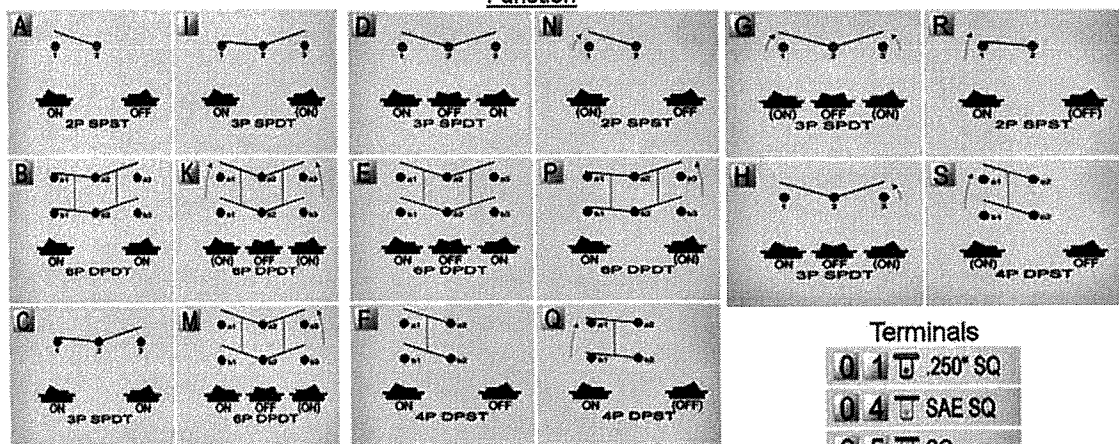

() = Momentary Function

- Terminals
- 1 250° SQ
 - 4 SAE SQ
 - 5 SO
 - 8 SC 6-32UNC

RoHS Compliant

1 Updated ratings. 2/08/18.

<p>Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p>	Date Drawn: 1/21/11	Rev. 1	Unit: mm	Checked By: <i>G. GULD</i>
	Title: ROCKER SWITCH		CW P/N: GRB260XXSERIES	