THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125/250VAC T85 20A 125VAC 21A 14VDC / 10A 28VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Switch Function	SEE CHART
Operation Temperature	-20°C~85°C

Mounting Hole



Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.1
1.25~2	21.2+0.1	36.8+0.1
2~3	21.2+0.1	37.0+0.1

FUNCTION

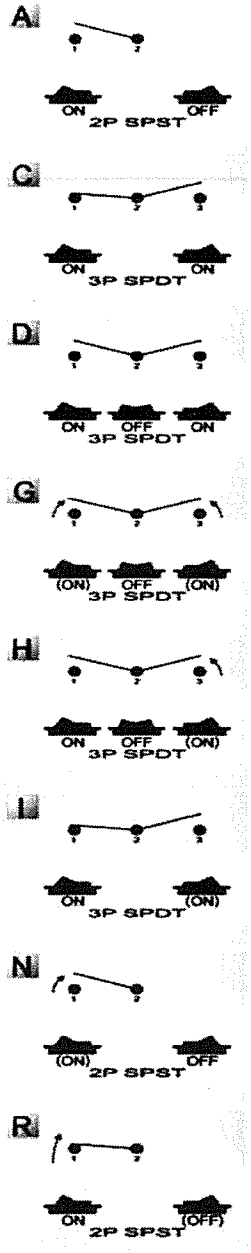

Frames are Black, nylon (UL flame: 94HB).
Actuators are Black, nylon with glass fiber (UL flame: 94HB).
Terminals are silver plated brass.
Waterproof and dustproof to fit IP-56.
Non · Illuminated



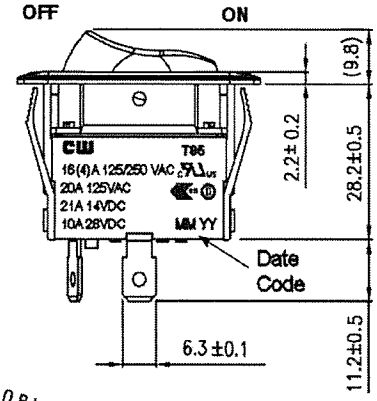

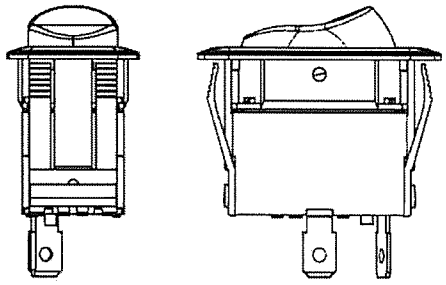

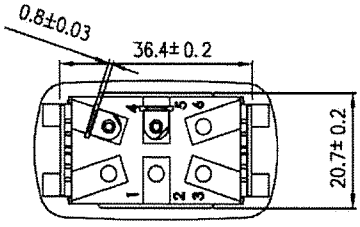

TERMINAL

- 01 .250" SQ
- 04 SAE SQ
- 05 SO
- 08 SC 6-32UNC

Order Chart

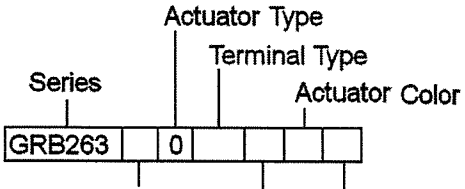

( )= Momentary Function

1	Updated views & ratings. 2/15/18		

CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 2/15/18	Rev. 1	Unit: mm	Checked By: G. GULD
	Title: ROCKER SWITCH		CW P/N: GRB263X0SERIES