


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	20A 125VAC / 10A 250VAC 21A 14VDC / 10A 28VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C ~ +85°C

Cut - Out		
X		
Y		
	X	Y
0.75~1.25	36.6 +0.1 -0	
1.25~2.0	36.8 +0.1 -0	21.2+0.1
2.0~3.0	37.0 +0.1 -0	

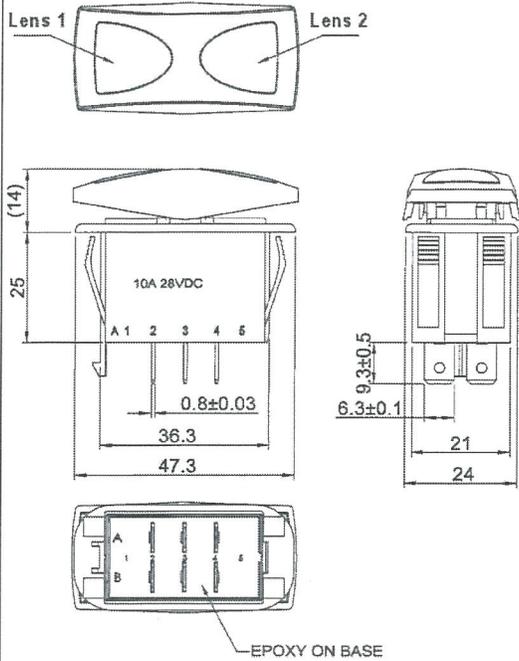


**Features:**  
 Frame: Nylon 66 (94V-2), Black.  
 Actuator: Nylon 66 +33%GF, Black.  
 ILLuminated Actuators: Molded in PC,  
 Ref. Lens color list.  
 Terminals : Silver plated copper.  
 Waterproof IP67 is reach by epoxy on  
 housing bottom.


**Actuator/Lens Color List**

A= Amber	G= Green
B= Black	R= Red
U= Blue	W= White

Lamp	Voltage
Bulb: B	1=12VDC, 2=24VDC
Neon: N	1=125VAC, 2=250VAC
Led: L	1=12VDC, 2=24VDC 4=125VAC, 5=250VAC

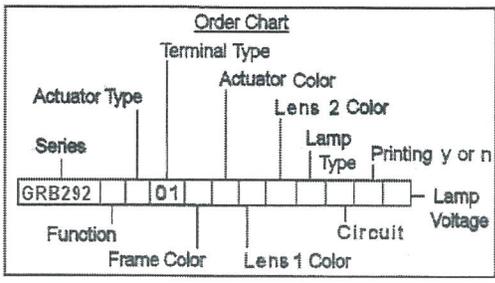


**FUNCTION**

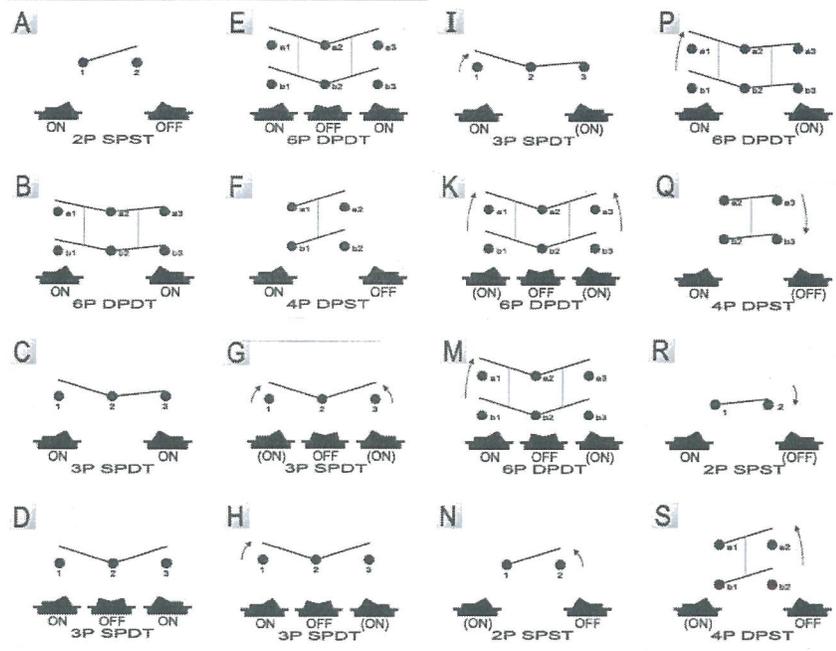

\* ( ) =momentary

**MASTER**

**ROCKER LIGHT CIRCUIT**

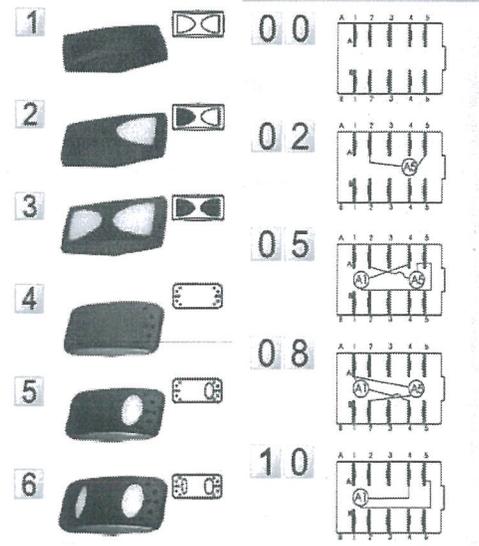

**TERMINAL**  
 0 1 .250" SQ

1 Updated Drawing. Removed 8(4)A 250VAC in rating & 3=Reg. in voltage. DW 4/16/24

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: DW 5/05/21 Rev. 1  
 Title: **ROCKER SWITCH**

Unit: mm Checked By: *G. GOLD*  
 CW P/N: **GRB292 SERIES**