
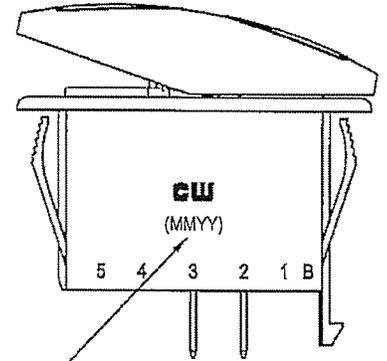
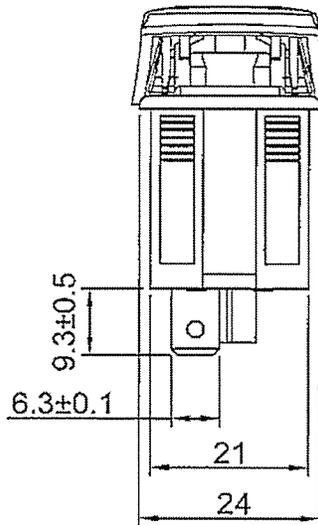
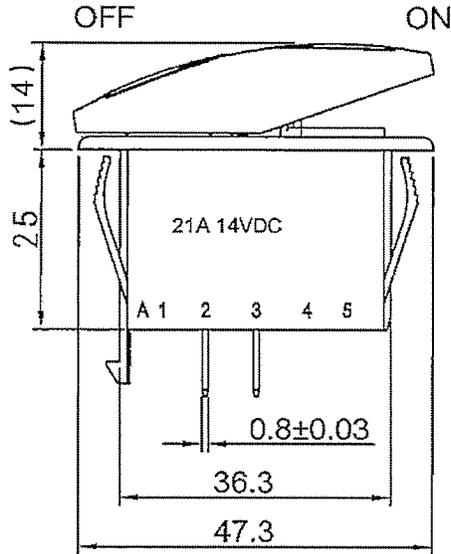


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	21A 14VDC											
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.											
Dielectric Strength	AC 1500V 1 minute											
Operation Temperature	-25°~85°											
Switch Function	2 P SPST OFF - ON	<table border="1"> <tr> <th>Thickness (mm)</th> <th>X (mm)</th> <th>Y (mm)</th> </tr> <tr> <td>0.75~1.25</td> <td rowspan="3">21.0 +0.3 -0</td> <td>36.6+0.1</td> </tr> <tr> <td>1.25~2.0</td> <td>36.8+0.1</td> </tr> <tr> <td>2.0~3.0</td> <td>37.0+0.1</td> </tr> </table>	Thickness (mm)	X (mm)	Y (mm)	0.75~1.25	21.0 +0.3 -0	36.6+0.1	1.25~2.0	36.8+0.1	2.0~3.0	37.0+0.1
Thickness (mm)	X (mm)	Y (mm)										
0.75~1.25	21.0 +0.3 -0	36.6+0.1										
1.25~2.0		36.8+0.1										
2.0~3.0		37.0+0.1										

MATERIALS:

- Frame: Nylon 66 (94V-2), Black
- Actuator: Nylon 66 (94V-2), Black
- Lens 1: PC, Black
- Lens 2: PC, Black
- Terminals: Silver plated copper
- Printing: None
- Water proof: IP 67

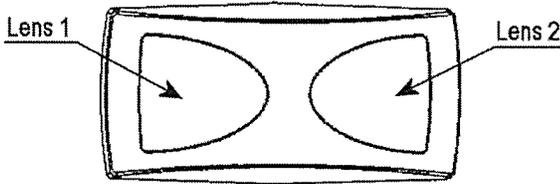

DATE CODE

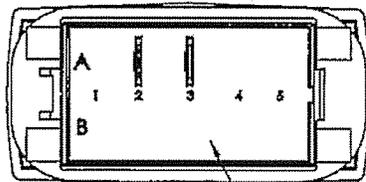

EPOXY ON BASE

Order Chart									
Terminal Style			Lens Color 1		Lens Color 2				
Series	Function	Actuator Style	Actuator Color	Frame Color					
GRB292	A 1	01	B	B	N	N	N	N	N

Tolerances Unless Otherwise Specified +/-0.3.

RoHS Compliant

R13-292A1-01-BBNN-1NNN0000E-1

1 Updated drawing. DW 5/10/18.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 6/09/17

Rev. 1

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB292A101BBNN**