






THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	21A 14VDC	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	- 25 °C ~ +85 °C	Thickness(mm)	X (mm)	Y (mm)
Switch Function	3P SPST OFF - ON Lamp Dependent	0.75~1.25	21.0 ^{+0.3} ₋₀	36.6+0.1
Lamp Type	LED 12VDC 14V w/Resistor	1.25~2.0		36.8+0.1
		2.0~3.0		37.0+0.1

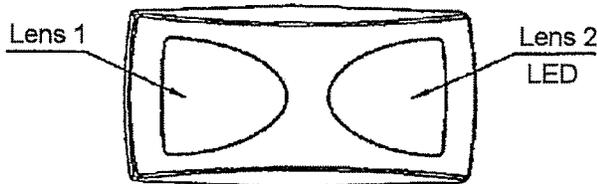

Material:

- Frame: Nylon 66 (94V-2), Black
- Actuator: Nylon 6633%GF, Black
- Lens 1: PC, Black
- Lens 2: PC, Red, Transparent
- LED: Red, Diffused
- Terminal: Silver plated copper (Except lamp terminal)
- Printing: None
- Waterproof: IP 67

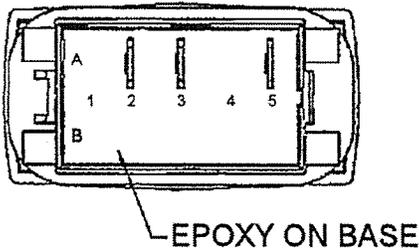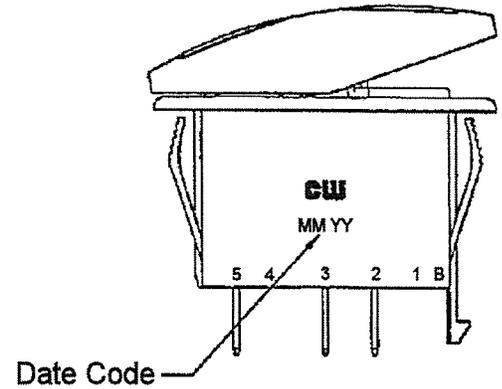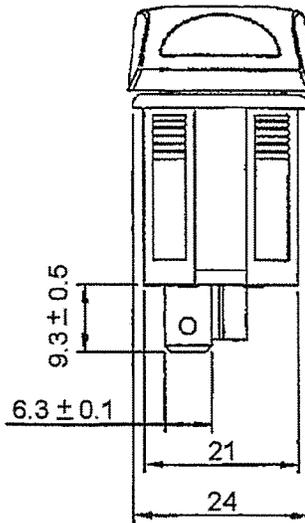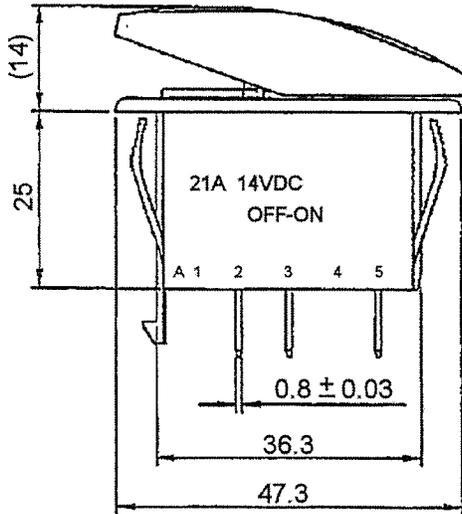

Order Chart									
Terminal Style		Series		Function		Actuator Style		Frame Color	
GRB292		A 2 01		B B N R		1		LED Voltage	

Tolerance: +/- 0.3mm Unless otherwise specified.

R13-292A2-01-BBNR-11NR0200-1

4 Redrawn. Updated with new notes. DW 5/04/18.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 4

Unit: mm

Checked By: *G. GULD*

Title: **ROCKER SWITCH**

CW P/N: **GRB292A201BBNR1**