
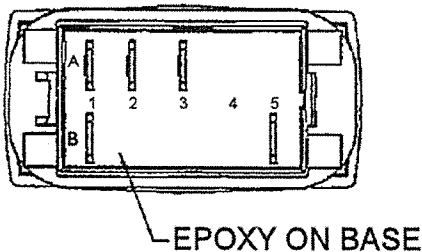
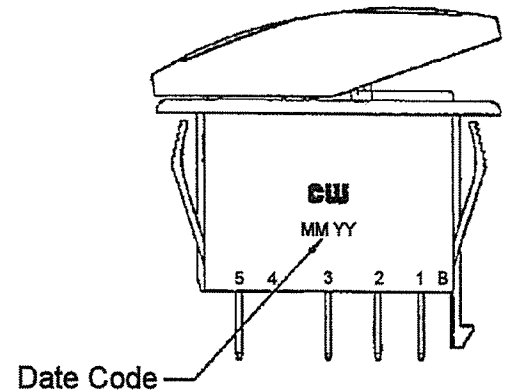
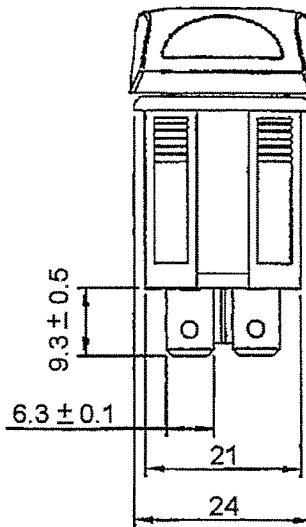
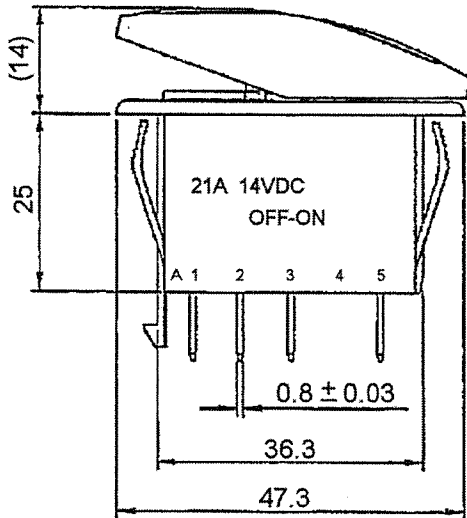


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	21A 14VDC		Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	- 25 °C ~ +85 °C		Thickness(mm)	X (mm)	Y (mm)
Switch Function	5P SPST OFF - ON		0.75-1.25	21.0 ^{+0.3} ₋₀	36.6+0.1
Lamp Type	LED 1 - 12VDC 14V Independent w/resistor LED 2 - 12VDC 14V Dependent w/resistor	1.25-2.0	36.8+0.1		
		2.0-3.0	37.0+0.1		

MATERIAL:

- Frame: Nylon - 66 (94V-2), Black
- Actuator: Nylon - 66 +33%GF, Black
- Lens 1: PC, Amber, Transparent
- Lens 2: PC, Green, Transparent
- LED 1: Amber, Diffused
- LED 2: Green, Diffused
- Terminal: Silver plated copper (Except Lamp Terminal)
- Printing: None
- Water proof: IP 67

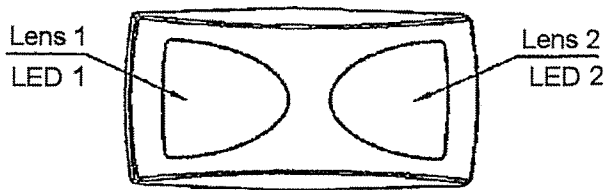

Order Chart									
Terminal Style			Lens Color 1			Lens Color 2			
Series		Function		Actuator Color		LED Voltage			
GRB292	A	3	01	B	B	A	G	1	
Actuator Style			Frame Color						

Tolerance: +/- 0.3mm Unless otherwise specified.

R13-292A3-01-BBAG-12AG0400-1

4 Redrawn, Updated Info. and format. DW 5/07/18

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 4

Unit: mm

Checked By: *G. GOLD*

Title: **ROCKER SWITCH**

CW P/N: **GRB292A301BBAG1**