


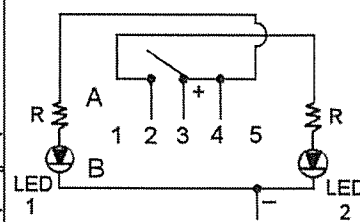
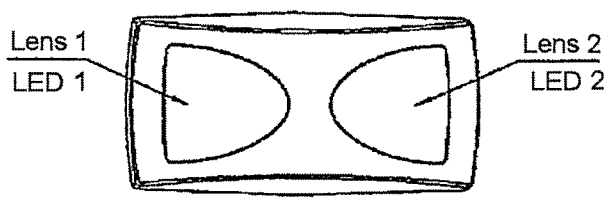
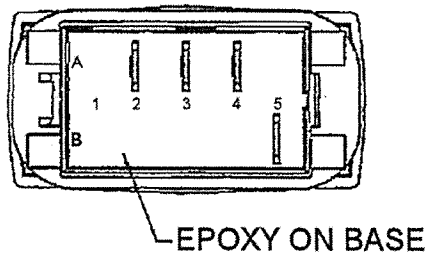
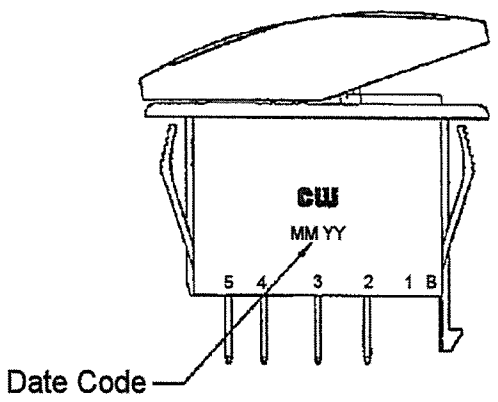


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	21A 14VDC	Mounting Hole 	Circuit Diagram 	
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.	Thickness(mm)	X (mm)	Y (mm)
Dielectric Strength	AC 1500V 1 minute	0.75-1.25	21.0 <sup>+0.3</sup> <sub>-0</sub>	36.6+0.1
Operation Temperature	- 25 °C ~ +85 °C	1.25-2.0		36.8+0.1
Switch Function	4P SPDT ON - ON	2.0-3.0		37.0+0.1
Lamp Type	LED 12VDC 14V w/resistor Dependent			

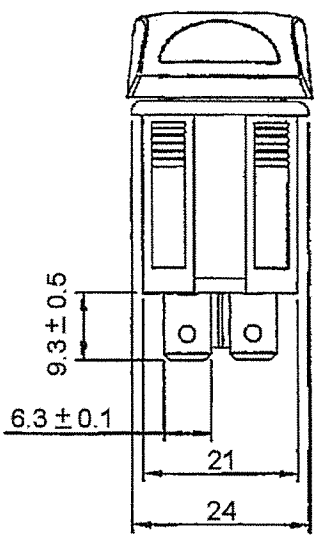

**MATERIAL:**  
 Frame: Nylon - 66 (94V-2), Black  
 Actuator: Nylon - 66 +33%GF, Black  
 Lens 1: PC, Red, Transparent  
 Lens 2: PC, Green, Transparent  
 LED 1: Red, Diffused  
 LED 2: Green, Diffused  
 Terminal: Silver plated copper  
 (Except Lamp Terminal)  
 Printing: None  
 Water proof: IP 67

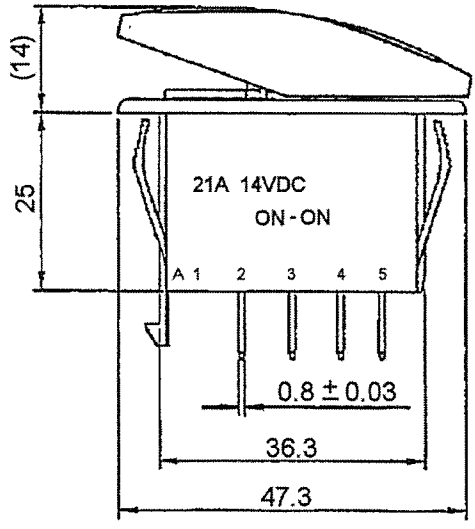


Order Chart									
Terminal Style	Series	Function	Actuator Style	Actuator Color	Frame Color	Lens Color 1	Lens Color 2	LED Voltage	
GRB292	C 3 01	B B	R	G	1				

Tolerance: +/- 0.3mm Unless otherwise specified.

R13-292C3-01-BBRG-12RG0500-1

3 Redrawn, Updated Info. and format. DW 5/07/18

 <b>CW INDUSTRIES</b> Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 5/20/10	Rev. 3	Unit: mm	Checked By: <i>G. GULD</i>
	Title: <b>ROCKER SWITCH</b>		CW P/N: <b>GRB292C301BBRG1</b>	