

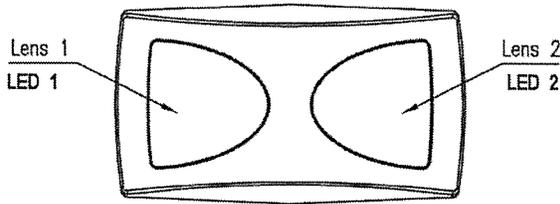
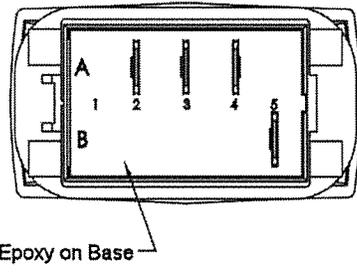
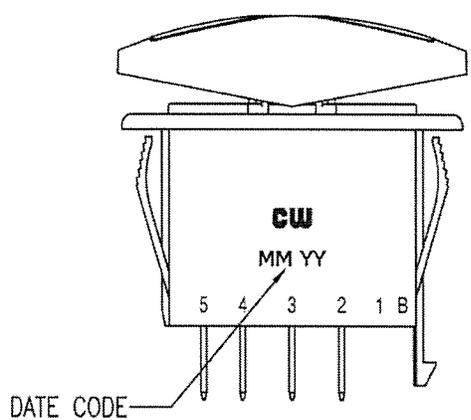


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating		21A 14VDC		Mounting Hole		Circuit Diagram									
Contact Resistance		50m ohm Max.													
Insulation Resistance		DC 500V 100M ohm Min.													
Dielectric Strength		AC 1500V 1 minute													
Operation Temperature		-25°~85°													
Switch Function		4P SPDT ON-OFF-ON		<table border="1"> <tr> <th>Thickness(mm)</th> <th>X(mm)</th> <th>Y(mm)</th> </tr> <tr> <td>0.75~1.25</td> <td rowspan="3">21.0^{+0.3}₀</td> <td>36.6±0.1</td> </tr> <tr> <td>1.25~2.0</td> <td>36.8±0.1</td> </tr> <tr> <td>2.0~3.0</td> <td>37.0±0.1</td> </tr> </table>		Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.0 ^{+0.3} ₀	36.6±0.1	1.25~2.0	36.8±0.1	2.0~3.0	37.0±0.1
Thickness(mm)	X(mm)	Y(mm)													
0.75~1.25	21.0 ^{+0.3} ₀	36.6±0.1													
1.25~2.0		36.8±0.1													
2.0~3.0		37.0±0.1													
Lamp Type	LED 12VDC 14V w/resistor Dependent														

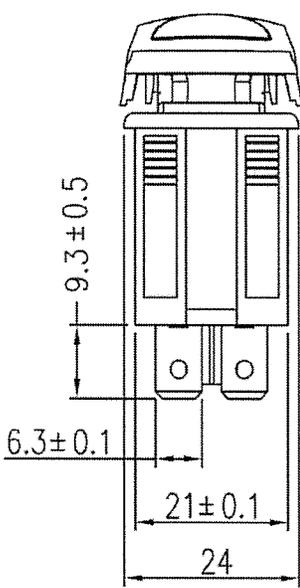

MATERIAL:
 Frame: Nylon - 66 (94V-2), Black
 Actuator: Nylon - 66 +33%GF, Black
 Lens 1: PC, Red, Transparent
 Lens 2: PC, Green, Transparent
 LED 1: Red, Diffused
 LED 2: Green, Diffused
 Terminal: Silver plated copper
 (Except Lamp Terminal)
 Printing: None
 Water proof: IP 67

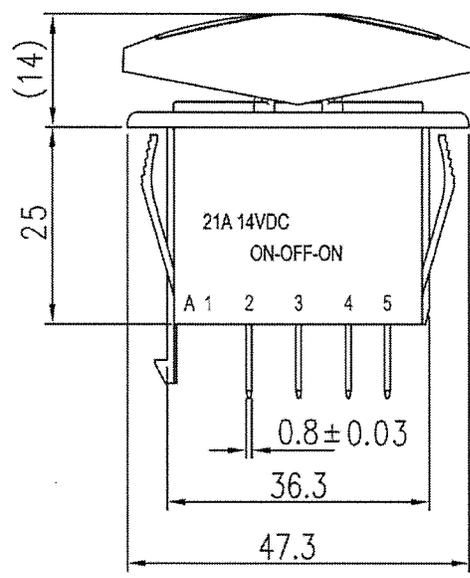

Order Chart									
Terminal Style			Lens Color 1		Lens Color 2			LED Voltage	
Series	Function		Actuator Color		Frame Color				
GRB292	D	3	01	B	B	R	G	1	
Actuator Style		Actuator Color		Frame Color					

Tolerance: +/-0.3mm Unless otherwise specified.

R13-292D3-01-BBRG-12RG0500-1

4 Redrawn. Updated info.. DW 5/07/18

<p>CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p>	Date Drawn: 9/29/09	Rev. 4	Unit: mm	Checked By: <i>G. GULD</i>
	Title: ROCKER SWITCH		CW P/N: GRB292D301BBRG1	