

SPECIFICATION:

Contact resistance: 20m ohm max. (initial)
 Insulation resistance: 100M ohm min. (at 500V DC)
 Dielectric strength: 1,500V AC 50/60 Hz for 1 minute
 Service life: Mechanically: 50,000 operations min.
 Electrically: 10,000 operations min.


Rating: 16(8)A 125/250V ~ T55

Function: (ON) - ON SPDT

KEYWAY
POSITION

Actuator: Brass / Dull Nickel Plated
 Waterproof rating: IP68

() = Momentary Function

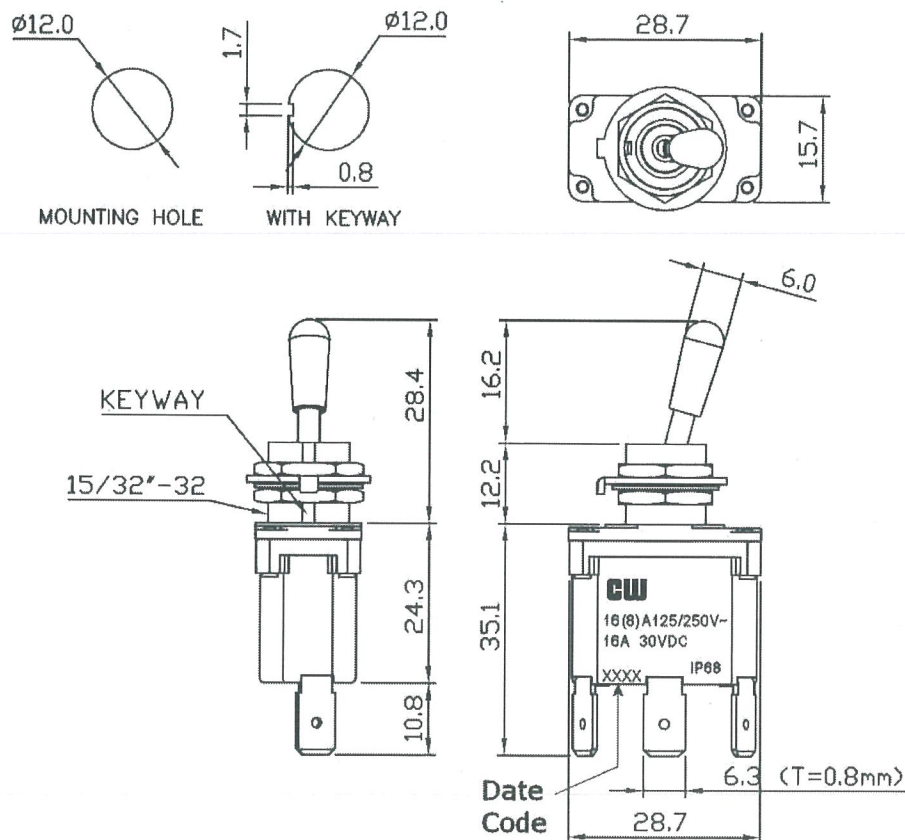

Order Chart

Series	Terminal Type	Label Type
GTB2	B	1
	8	C
	Lever Type	Position/Function

Tolerances unless otherwise specified: ± 0.12 (mm)
 0.3

RoHS Compliant

TB2-AB18-1C

MASTER

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 3-23-12

Rev. 2

Unit: mm

Checked By: *G. GULD*

Title:

TOGGLE SWITCH

CW P/N:

GTB2B18C

2 Redrawn. Service life 50,000 & 10,000 was 100,000 & 30,000. DW 12/5/22.

1 Redrawn. 16(8)A125/250V~T55 was 12A 125VAC/250VAC. CW P/N GTB2B18 changed to GTB2B18C. DGW 5/05/22