

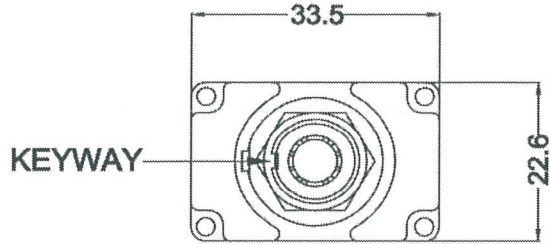


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.




Rating: 16(8)A 125/250V~ T55  
 Electrical Life: 10,000 cycles  
 Mechanical Life: 50,000 cycles  
 Contact resistance: 20mΩ Initial (MAX),  
 Insulation resistance: 500VDC - 100MΩ (MIN).  
 Dielectric Strength:  
 (1) 1500VAC For 1 minute (Terminal to Enclouse)  
 (2) 500VAC For 1 minute (Terminal to Terminal)  
 Degree of protection: IP68 (Above the panel)  
 Actuator: Brass/Dull Nickel Plated

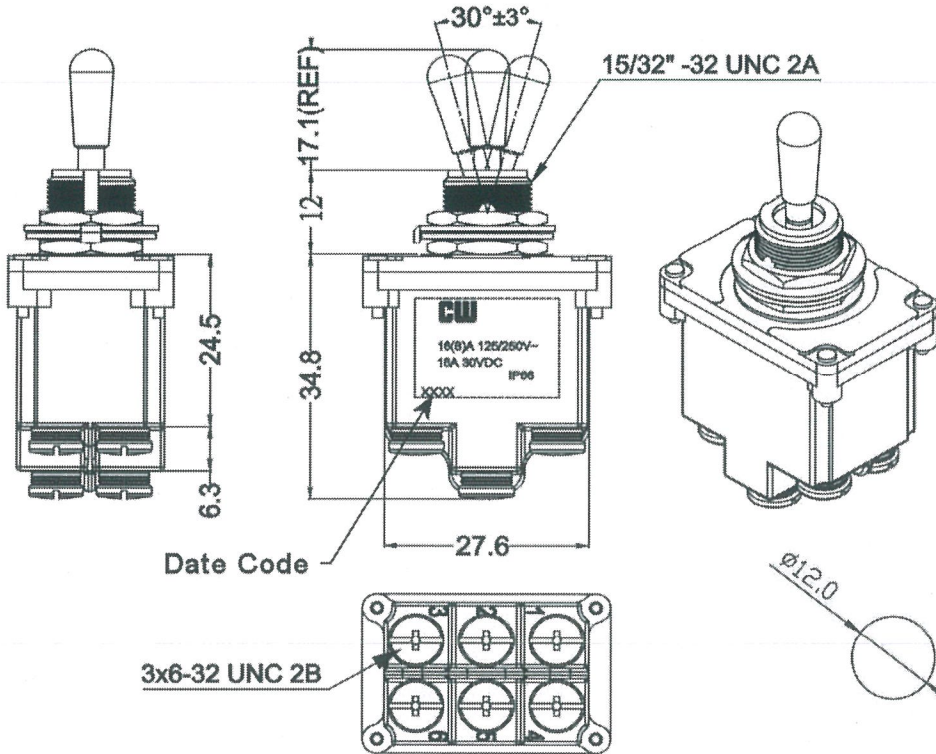

SWITCH FUNCTION		
( ON )	ON	( ON )
( 1-2 )	1-2	( 2-3 )
( 4-5 )	5-6	( 5-6 )

Order Chart			
Series	Terminal Type	Label Type	
GTB3	B	5	70 C
Lever Type	Position/Function		

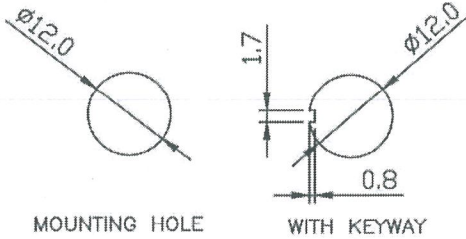

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± .02 / 0.5 (mm).

**MASTER**

TB3-AB570-1C

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: DW 7/19/23

Rev. 0

Unit: mm

Checked By: *G. GOLD*

Title: **TOGGLE SWITCH**

CW P/N: **GTB3B570C**