THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

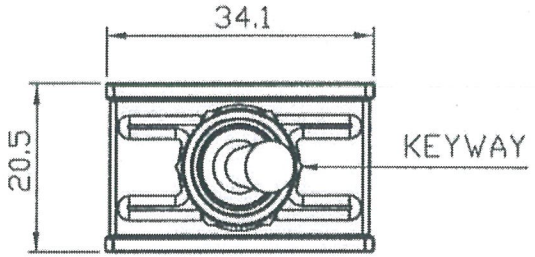

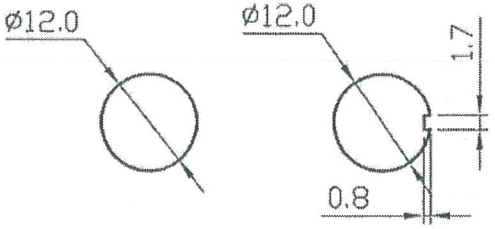

MOUNTING HOLE WITH KEYWAY

Specification :

Contact resistance: 20mΩ max. (initial)
Insulation resistance: 100MΩ min. (at 500V DC)
Dielectric strength: 1,500V AC 50/60 Hz for 1 minute
Service life: Mechanically: 50,000 operations min.
Electrically: 10,000 operations min.

Rating: 25A 125V AC ; 15A 250V AC
25A 12V DC ; 15A 24V DC
Function: ON - OFF
Keyway Position

Operating Temperature:

150° C

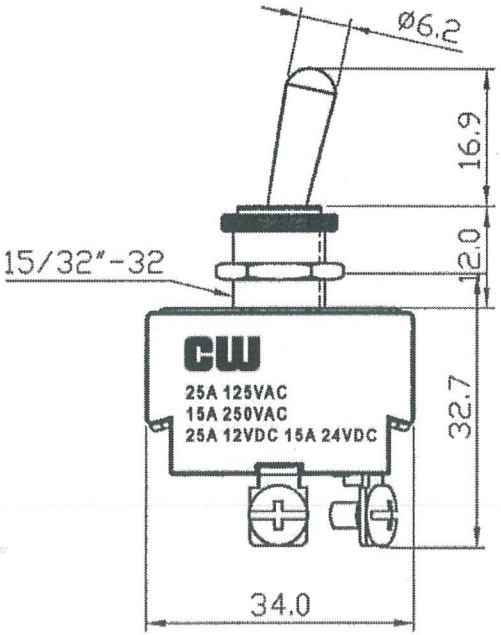

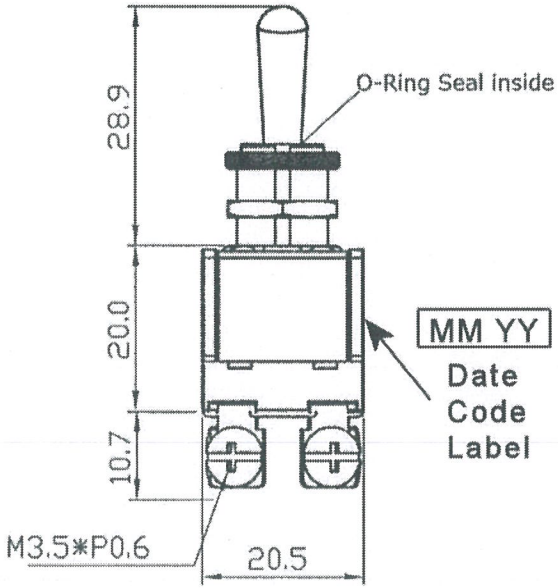



RoHS Compliant

TOLERANCES			UNLESS NOTED
X.	±	0.3	MIN WALL THICKNESS
X.X	±	0.2	MAX. DRAFT 2 / SIDE
X.XX	±	0.1	ALL RADII

MASTER

SW-2724-CB2-M-4

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/28/13 | Rev. 1 | Unit: mm | Checked By: G.GULD

Title: TOGGLE SWITCH

CW P/N: GTB4A42HT

1	Redrawn. Service life 50,000 & 10,000 was 100,000 & 30,000. DW 12/5/22.