
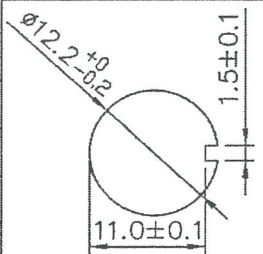




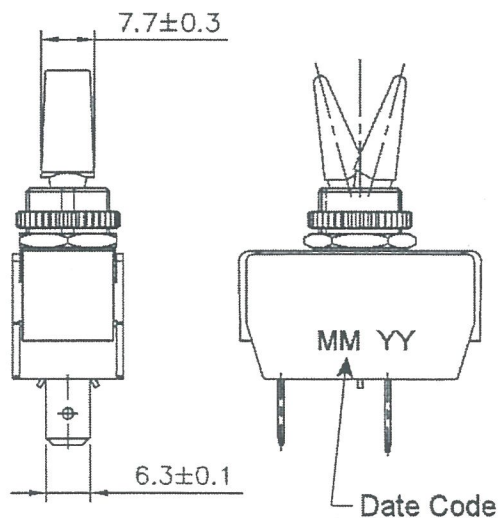
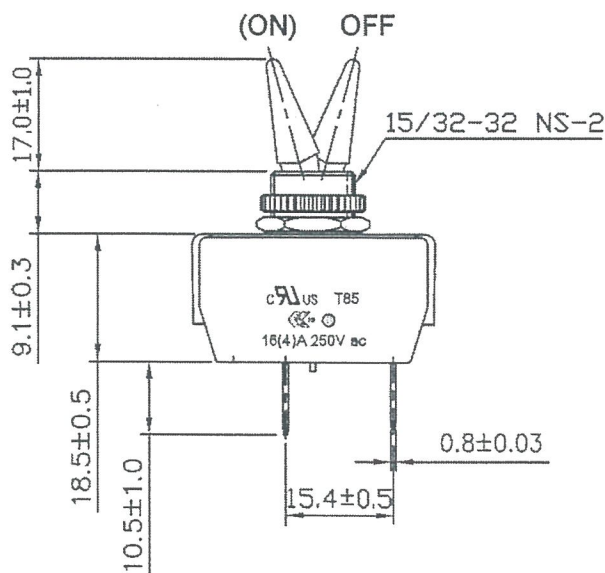
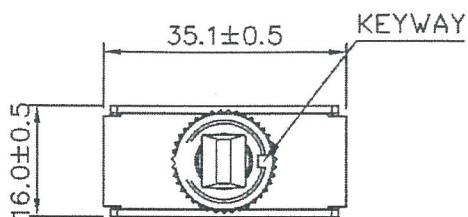
THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

|                              |                      |   |  |   |
|------------------------------|----------------------|---|--|---|
| <b>Rating</b>                | 16(4)A 250V ac       |  | <b>Mounting Hole</b>   | <b>Circuit</b>  |
| <b>Contact Resistance</b>    | 50m ohm Max          |   |  |  |
| <b>Insulation Resistance</b> | DC 500V 100M ohm Min |   |  |   |
| <b>Dielectric Strength</b>   | AC 1500V 1minute     |   |  |   |
| <b>Switch Function</b>       | 2P SPST (ON) - OFF   |   |  |   |
| <b>Operation Temperature</b> | 0°C~85°C             |   |  |   |

( ) = Momentary Function

**Material:**

- Frame: Nylon 66
- Cover: PA 66 + 30% GF
- Lever: Plastic
- Terminal: Copper Alloy
- Contact: Copper Alloy
- Water proof and Dust proof to fit IP56




RoHS Compliant

R13-447N-3-01-HR

| ORDER CHART   |                        |
|---------------|------------------------|
| Series        | Function               |
| GTS447        | N 3 01 H R - Knurl Nut |
| Paddle Type   |                        |
| Terminal Type |                        |
| Hex Nut       |                        |

1 Updated Order Chart, SCI part number & CWI logo APhilip 06/06/23

|  |                      |        |                      |                            |
|--|----------------------|--------|----------------------|----------------------------|
|  <p>Southampton, Pa. 18966<br/>Tel 215.355.7080/www.cwind.com</p> | Date Drawn: 8/22/12  | Rev. 1 | Unit: mm             | Checked By: <i>G. Gold</i> |
|  | Title: TOGGLE SWITCH |        | CW P/N: GTS447N301HR |                            |

MASTER