
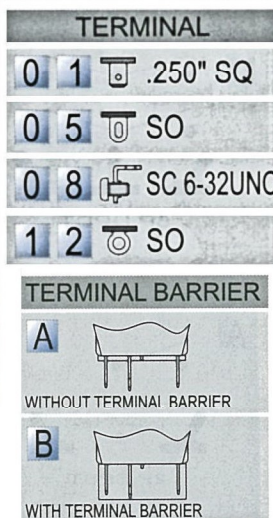
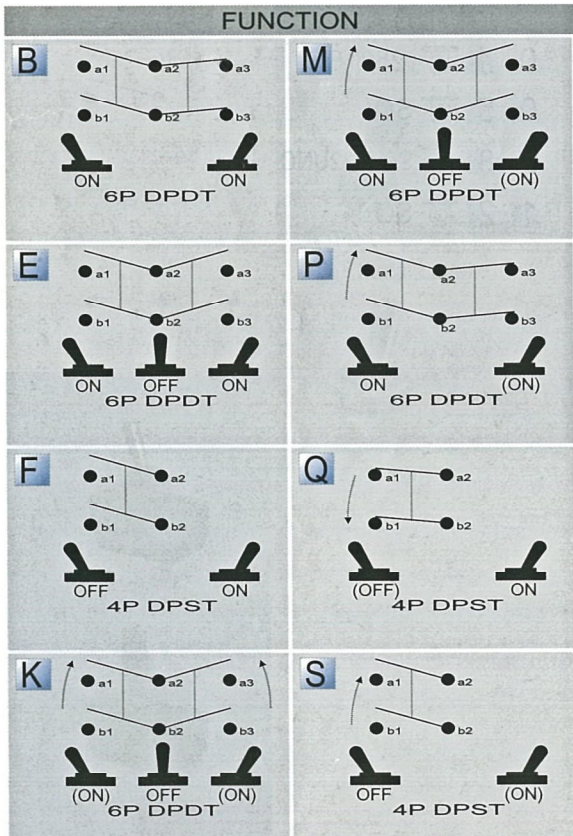
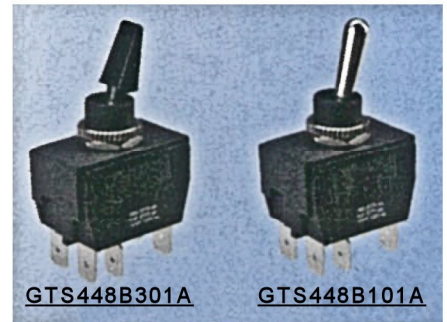


<b>Rating</b>
16(4)A 250V AC (F,S,Q) 12(4)A 250V AC (B,E,K,M,P)
<b>Contact resistance</b>
50mΩ Max
<b>Insulation resistance</b>
DC 500V 100MΩ Min
<b>Dielectric strength</b>
AC 1500V 1 minute
<b>Cut-out</b>

**FEATURES**

- \* MATERIAL: Metal lever is nickel plated metal. Bushing is nylon with glass fiber ( UL flame: 94V-0). Frame is nylon ( UL flame: 94V-2).
- \* Watertight boot is optional for lever #1 only.

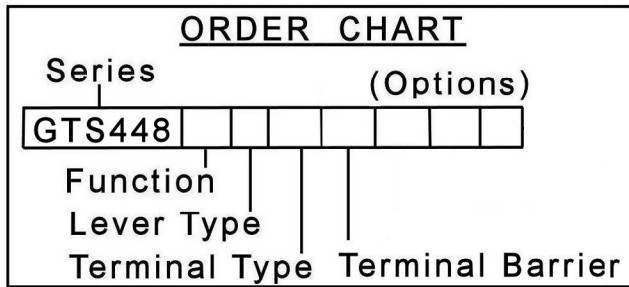

OPTIONS		
<b>W</b>	Spring Washer	
<b>P</b>	ON/OFF Face Plate	
<b>Q</b>	HI/LO Face Plate	
<b>R</b>	Knurl Nut	
<b>H</b>	Hex Nut	
<b>K</b>	Black Knurl Nut	
<b>M</b>	Black Hex Nut	
<b>N</b>	Locating Ring	
<b>L</b>	Lock Washer	
<b>T</b>	Rubber Boot	
<b>U</b>	Body PVC Coating	