





THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

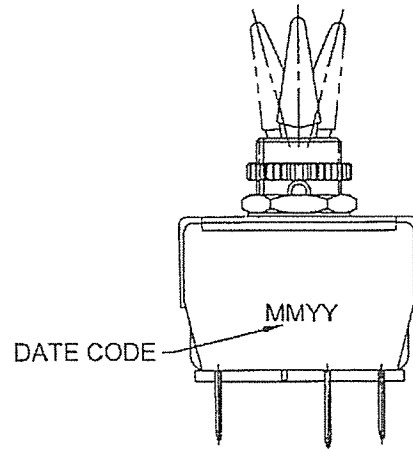
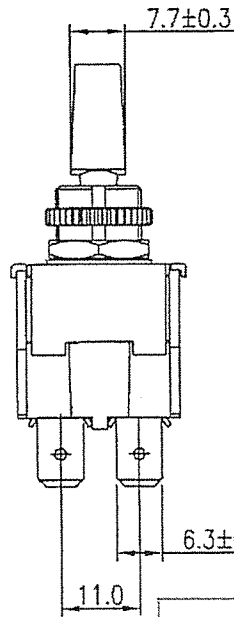
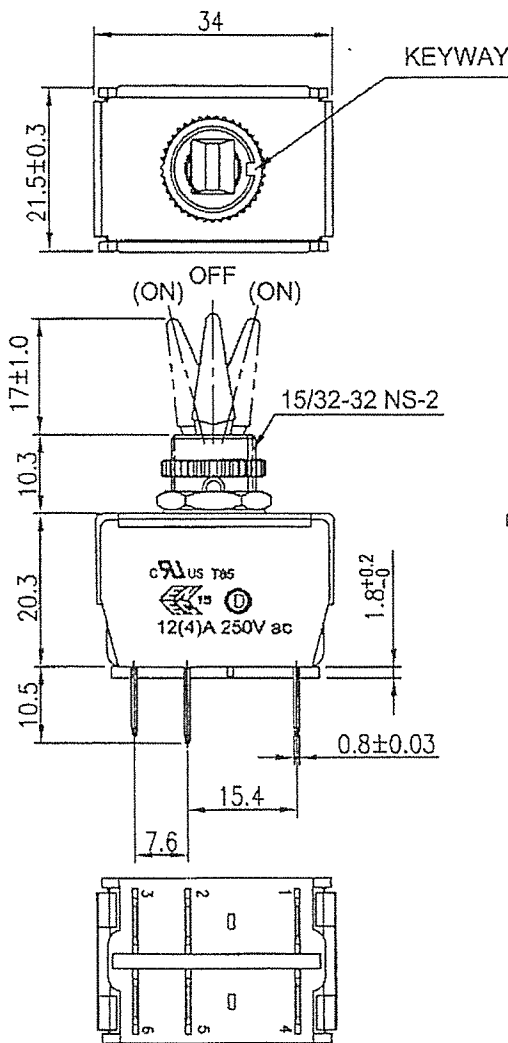
Ratings	12 (4) A 250V AC  		Mounting Hole	Circuit
	Contact Resistance	50m ohm max.		
	Insulation Resistance	DC 500V 100M ohm Min.		
	Dielectric Strength	AC 1500V 1 minute		
	Operation Temperature	0° C ~ 85° C		
Switch Function	6P DPDT (ON) - OFF - (ON)			

() = Momentary Function

MATERIAL:

- Frame: Nylon 6/6, Black
- UL Flame: 94-V0
- Lever: Nylon 66+30%GF
- UL Flame: 94-V0
- Terminal: Copper Alloy

Water proof and Dust Proof
to fit IP-56



Tolerances Unless Otherwise Specified +/-0.5.

Order Chart	
Series	Lever Type Plastic
GTS448	K 3 01 AHR
Function	Knurl Nut
Term. Type .250" SQ	Hex Nut
No Barrier	

RoHS Compliant
R13-448K-3-01A-HR

- 2 | Updated Order Chart, SCI part number & CWI logo APhiip 02/06/23
- 1 | Updated material notes. 3-21-13.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 8/09/12

Rev. 2

Unit: mm

Checked By: *G. Gold*

Title:
TOGGLE SWITCH

CW P/N:
GTS448K301AHR