






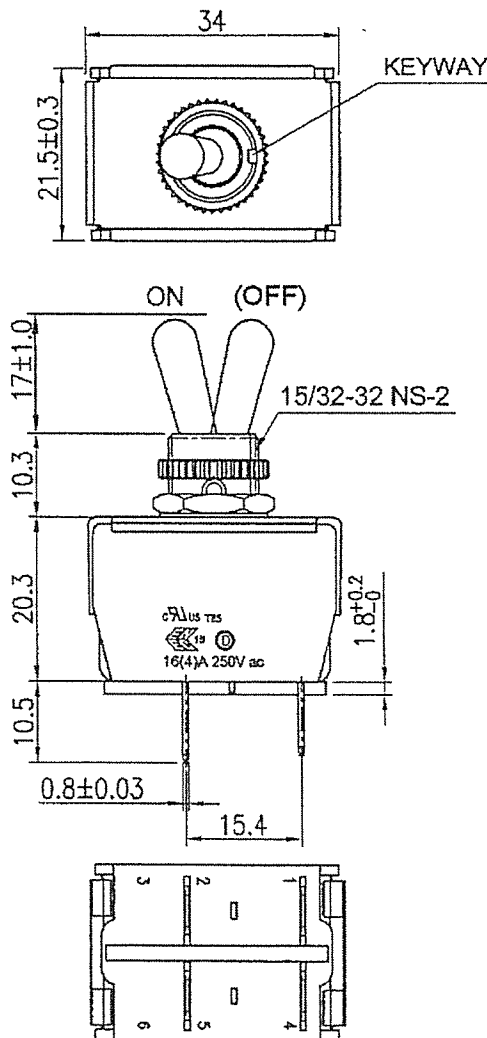
THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 250V AC	 	Mounting Hole 	Circuit 
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Switch Function	4P DPST ON - (OFF)			
Operation Temp.	0° C ~ 85° C			

( ) = Momentary Function

**MATERIAL:**  
 Frame: Nylon 6/6, Black  
 UL Flame: 94-V0  
 Lever: Metal  
 Terminal: Copper Alloy

Water proof and Dust Proof  
 to fit IP-56



Tolerances Unless Otherwise Specified +/-0.5.

Order Chart	
Series	Lever Type Metal
GTS448	Q   I   01   A   H   R — Knurl Nut
Function	Hex Nut
Term. Type .250" SQ	No Barrier

RoHS Compliant  
 R13-448Q-1-01A-HR

2 | Updated Order Chart, SCI part number & CWI logo APhilip 02/06/23  
 1 | Updated material notes. 3-21-13.

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn; 8/13/12

Rev. 2

Unit: mm

Checked By: *G. Guld*

Title:  
**TOGGLE SWITCH**

CW P/N:  
**GTS448Q101AHR**