

Hardware Mounting Kits for All-Plastic D-Connectors

To order, specify CWN-HK-XX.

CWN-HK-01

For midspan splices or panel mounting with 2-56


JACK SCREW
C-84-01

RETAINING RING
C-36-01

STAND-OFF
C-83-01

LOCK WASHER
G-07-06-01

FILISTER SCREW
C-09-03

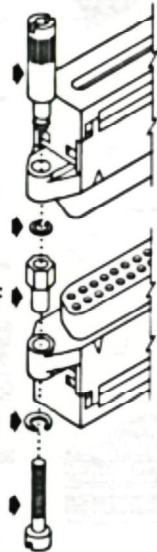

FILISTER SCREW
C-09-01

LOCK WASHER
G-07-06-04

STAND-OFF
C-83-03


FLAT WASHER
G-07-05-02

LOCK WASHER
G-07-06-04

HEX NUT
C-28-01

CWN-HK-02

For midspan splices with metal-shell D connectors using 4-40 hardware.

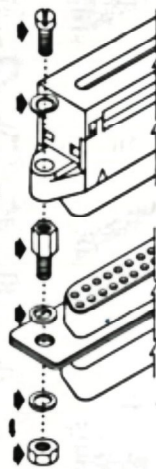


CWN-HK-03

Two 4-40 threaded jack screws and retaining rings for midspan splices.

JACK SCREW
C-84-03

RETAINING RING
C-36-01

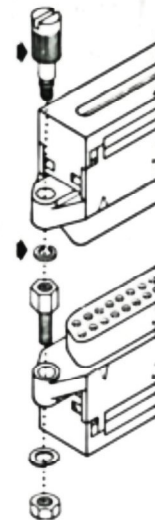

STANDOFF
C-83-09

LOCK WASHER
G-07-06-04

HEX NUT
C-28-01

CWN-HK-04

Two 4-40 threaded jack sockets, lock washers and hex nuts for midspan splices or panel mounting.



CWN-HK-05

Two 4-40 threaded jack screws and thread press-fit inserts* for midspan cable splices.

*requires connector mounting holes enlarged to .150".

JACK SCREW
C-84-04

Threaded Insert
C-28-09



HARDWARE SCREW
C-06-08

THREADED INSERT
C-28-02

HEX NUT
C-28-03

LOCK WASHER
G-07-06-01

THREADED INSERT
C-28-02

CWN-HK-06

Two 2-56 threaded screws, four threaded press-fit inserts, two hex nuts and lock washers for economical midspan splices.

