THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Termination Styles

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING .....

Dwg. No.

REVISIONS
1 Updated & Redrawn. DGW 2/12/16

P.C. Terminal

Solder Terminal

Solder Terminal

Solder Terminal

Quick Connect Terminal

Solder Terminal

Wire Leads (Single Pole Switches Only)

Wire lead 18AWG. Consult factory for length & color.

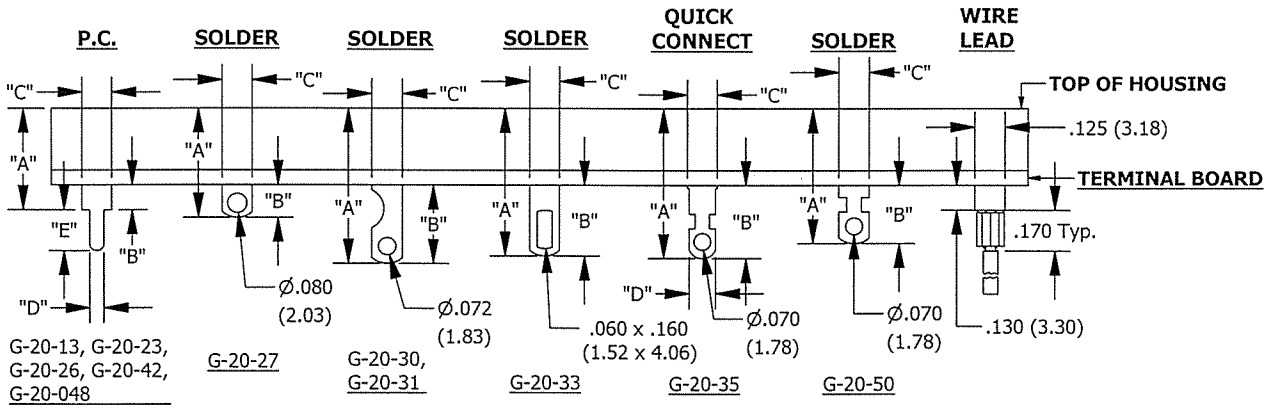

In-Line Terminals

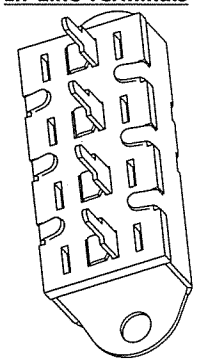

Staggered Terminals

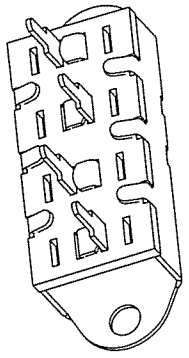

Note:
Staggered terminals available in Single Pole versions Only.

TERMINAL PART NUMBERS

DIM.	G-20-13	G-20-23	G-20-26	G-20-27	G-20-30	G-20-31	G-20-33	G-20-35	G-20-42	G-20-48	G-20-50
"A"	.450±.015 (11.43±0.38)	.450±.015 (11.43±0.38)	.413±.015 (10.49±0.38)	.475±.015 (12.07±0.38)	.680±.015 (17.27±0.38)	.580±.015 (14.73±0.38)	.680±.015 (17.27±0.38)	.632±.015 (16.05±0.38)	.722±.015 (18.34±0.38)	.535±.015 (13.59±0.38)	.635±.015 (16.13±0.38)
"B"	.130±.010 (3.30±0.25)	.130±.010 (3.30±0.25)	.093±.010 (2.36±0.25)	.155±.020 (3.94±0.51)	.360±.020 (9.14±0.51)	.260±.020 (6.60±0.51)	.360±.020 (9.14±0.51)	.312±.020 (7.92±0.51)	.402±.010 (10.21±0.25)	.215±.010 (5.46±0.25)	.315±.020 (8.00±0.51)
"C"	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)	.125 (3.18)
"D"	.060 (1.52)	.064 (1.63)	.060 (1.52)	———	———	———	———	.111 (2.82)	.060 (1.52)	.060 (1.52)	———
"E"	.170 (4.32)	.390 (9.91)	.210 (5.33)	———	———	———	———	———	.170 (4.32)	.170 (4.32)	———

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966

TOLERANCES UNLESS OTHERWISE SPECIFIED
2 Place Decimal ± .010
3 Place Decimal ± .005
Angles ..... ± 1°
METRIC
1 Place Dec. ± .25mm
2 Place Dec. ± .13mm

Title: SLIDE SWITCH TERMINAL OPTIONS

Made for: CW IND.
Drawn by: DGW 2/12/16
Checked by: G. GOULD 3/7/16
Approval: C. Hess 3/7/16

Division:
Dwg. No.

1 2 3 4 5 6 7 8 9 10