THIS INFORMATION IS CONFIDENTIAL AND PROPIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN CW INDUSTRIES PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Item Number Example:

GMR	2	1	0	C	5	W	N	B	B	3

SERIES	POLE	FUNCTION	TERMINAL TYPE	ACTUATOR TYPE	MARKING TYPE	MARKING COLOR	ILLUMINATED TYPE	BASE COLOR	ACTUATOR COLOR	RATING/ TEMPERATURE
GMR	1 Single Pole 2 Double Pole	1 ON-OFF	0 Quick Connect 1 Solder 2 PC Terminals	C Curve	1 HI Lo 2 No Marking 3 ON OFF 4 O I 5 O –	N None B Black W White R Red	N No Lamp L ILLuminated 100-125VAC G ILLuminated 200-250VAC 6 LED DC6V 7 LED DC12V 8 LED DC24V	B Black W White A Gray	B Black W White A Gray O Orange G Green R Red	A 10(4)A 125/250VAC T55 B 12(4)A 125/250VAC T55 C 16(4)A 125/250VAC T55 D 16A (6-30VDC) T55 — ILLuminated Ratings A, B, C, D UL/CUL ENEC 1 10(4) 125/250VAC T125/55 2 12(4) 125/250VAC T125/55 3 16(4) 125/250VAC T125/55 4 16A (6-30VDC) T125/55 — Non-ILLuminated Ratings 1, 2, 3, 4 UL/CUL ENEC

Dwg. No. GMR SERIES

REVISIONS: 0 New. DW 8/13/26







X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	$19.2^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm
1.25~2mm	$19.4^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm
2~3mm	$19.8^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm

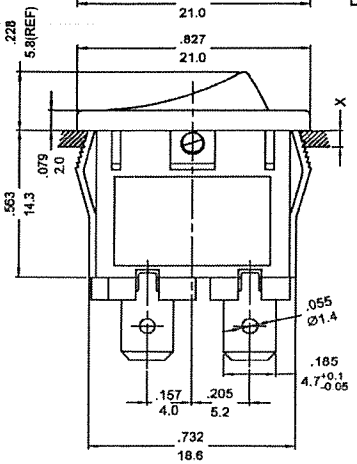

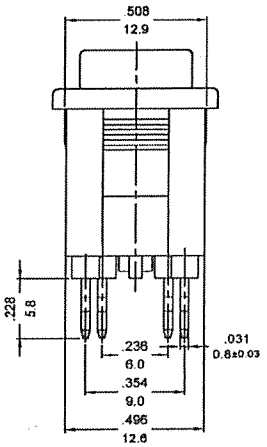

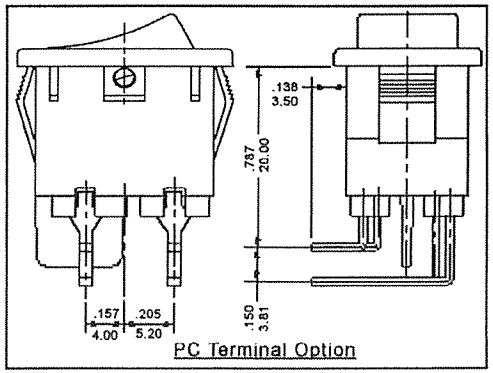

Dielectric Withstand Voltage: 1500VAC for 1 minute
Insulation Resistance: 500VDC 100MΩ (Min.)
Contact Resistance: 20mΩ Initial (Max.)
Electrical Life: 10,000 cycles min.
Mechanical Life: 30,000 cycles min.
Base: Nylon 6/6, 94V-2 min.
Actuator: Nylon 6/6, 94V-2 & Polycarbonate, 94V-2.
Moving Contact: Silver plated copper alloy.
Terminals: Silver plated copper alloy.
Temperature: T55 - 55°C Max., Housing & Actuator.
T125/55 - 125°C Max., Housing.
55°C Max., Actuator.

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING

OSLO SWITCH
CW Industries
A Unit of Electro Switch Corp.

Title: GMR MINIATURE ROCKER SWITCH SERIES 13MM x 19MM

Made for: CW\OSLO
Drawn by: DW 8/13/26
Checked by: G.GOULD 8-14-26
Approved: S/14/26
Division: SWITCH
Dwg. No. GMR SERIES

MASTER