




THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	20A 125V AC 1/3HP 10A 250V AC 1/2HP	Cut-Out for X8 Switch	Cut-Out																	
	20A 12V DC, 10A 24V DC																			
Contact Resistance	50m ohm Max.	  <table border="1"> <tr> <td>0.75-1.25</td> <td>30.2-0.1</td> <td>22.2+0.1</td> <td>0.75-1.25</td> <td>30.2-0.1</td> <td>22.2+0.1</td> </tr> <tr> <td>1.25-2.0</td> <td>30.4-0.1</td> <td>22.2+0.1</td> <td>1.25-2.0</td> <td>30.4-0.1</td> <td>22.2+0.1</td> </tr> <tr> <td>2.0-4.0</td> <td>30.8-0.1</td> <td>22.2+0.1</td> <td>2.0-4.0</td> <td>30.8-0.1</td> <td>22.2+0.1</td> </tr> </table>	0.75-1.25	30.2-0.1	22.2+0.1	0.75-1.25	30.2-0.1	22.2+0.1	1.25-2.0	30.4-0.1	22.2+0.1	1.25-2.0	30.4-0.1	22.2+0.1	2.0-4.0	30.8-0.1	22.2+0.1	2.0-4.0	30.8-0.1	22.2+0.1
0.75-1.25	30.2-0.1		22.2+0.1	0.75-1.25	30.2-0.1	22.2+0.1														
1.25-2.0	30.4-0.1		22.2+0.1	1.25-2.0	30.4-0.1	22.2+0.1														
2.0-4.0	30.8-0.1		22.2+0.1	2.0-4.0	30.8-0.1	22.2+0.1														
Insulation Resistance	DC 500V 100M ohm Min.																			
Dielectric Strength	AC 1500V 1 minute																			
Operation Temperature	-25°C ~ 85°C																			
Switch Function	See Chart																			

### Standard Switch

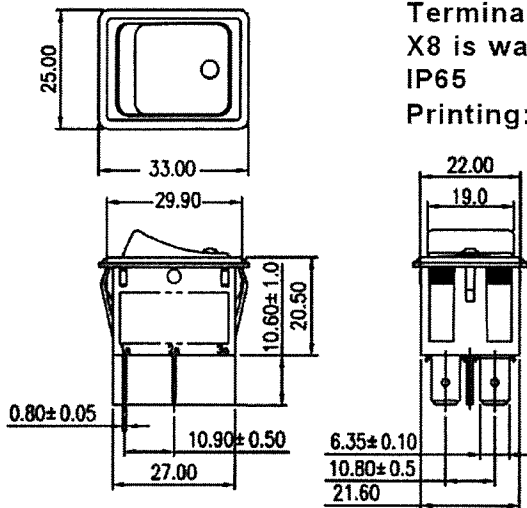

### Materials:

Frame: Black, Nylon 66 (94-V2)  
 Actuator: Black, Nylon 66 (94-V2) std.  
 Ref. Color List.  
 Terminals: Silver plated brass  
 X8 is waterproof: Black silicone IP65  
 Printing: Options available

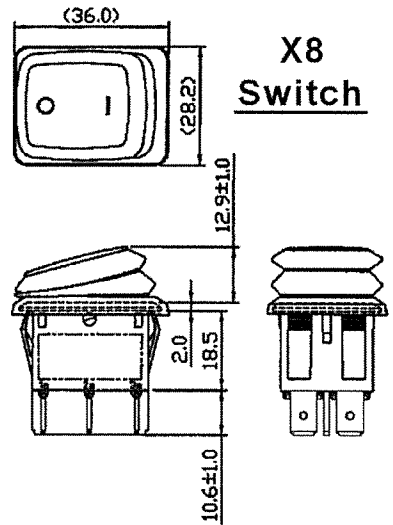

### Actuator/Lens Color List

A= Amber G= Green  
 B= Black R= Red  
 U= Blue W= White

FUNCTION		ROCKER	
Illuminated / Different position			
Watertight			
<b>TERMINAL</b>			
0 1 □ .250" SQ			

Lamp	Voltage
Bulb: B	1=12VDC, 2=24VDC
Neon: N	1=125VAC, 2=250VAC
Led: L	1=12VDC, 2=24VDC, 3=Reg.
Led: L	4=125VAC, 5=250VAC

Order Chart									
Series		Frame Color	Actuator Color	Printing (y or n)		Voltage			Lamp Type
GRB285		01	B						
Function		Rocker Style		Terminal		Led Color		Led/Lens Color	

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: DW 2/09/21

Rev. 0

Unit: mm

Checked By: *dw*

Title:

**ROCKER SWITCH**

CW P/N:

**GRB285 SERIES**